

Protective covers - VS-PPC-C2-PC-ROBK-L - 1405303

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sealing plug with locking for push-pull panel mounting frame, power (VS-PPC-F2...), IP65/67 degree of protection

Snap-on cap



Key Commercial Data

Packing unit	1 STK
GTIN	
GTIN	4046356420419
Weight per Piece (excluding packing)	10.600 g
Custom tariff number	39269097
Country of origin	Germany
Note	Made to Order (non-returnable)

Technical data

Ambient conditions

Ambient temperature (assembly)	-5 °C ... 55 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Ambient temperature (assembly)	-5 °C ... 55 °C

General data

Degree of pollution	2
	2
Alternative short product description	Sealing plug for panel mounting frame
Locking type	Push Pull

Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Protective covers - VS-PPC-C2-PC-ROBK-L - 1405303


Technical data

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Dimensional drawing

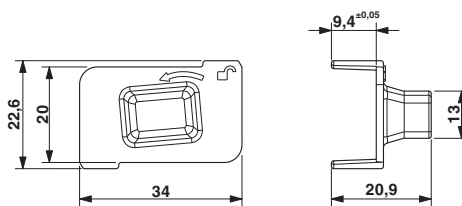

Sealing plug with locking for push-pull panel mounting frame

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27261290
eCl@ss 7.0	27440290
eCl@ss 8.0	27440208
eCl@ss 9.0	27440208

ETIM

ETIM 3.0	EC000723
ETIM 4.0	EC002314
ETIM 5.0	EC002314
ETIM 6.0	EC002314

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	39121421

Protective covers - VS-PPC-C2-PC-ROBK-L - 1405303

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		EAC-Zulassung
-----	---	---------------
