

## Marker for terminal blocks - UC-TM 10 CUS - 0824605

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications,  
Mounting type: Snap into tall marker groove, for terminal block width: 10.2 mm, Lettering field: 9.6 x 10.5 mm



### Why buy this product

- ✓ The UC-TM ... UniCard labeling range includes markers for products with tall marker grooves
- ✓ The markers, which are supplied in uniform sheets, can be labeled quickly and easily using the BLUEMARK LED
- ✓ Labeling service: Phoenix Contact can custom-label all UniCard markers according to your requirements
- ✓ The multi-section marking strips are easy to fit and can be easily separated if required
- ✓ The sheets provide space for including function texts
- ✓ The markers support multi-line labeling
- ✓ The format automatically ensures printing with a high degree of positioning accuracy



### Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 359375
GTIN	4046356359375
Weight per Piece (excluding packing)	12.390 g
Custom tariff number	49119900
Country of origin	Germany
Note	Made to Order (non-returnable)

### Technical data

#### Dimensions

Width (a)	10 mm
-----------	-------

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 120 °C
Recommended storage conditions	23°C/50% relative humidity. Storage in a dry and dark place in the original packaging is recommended.

# Marker for terminal blocks - UC-TM 10 CUS - 0824605

## Technical data

### General


Color	white
Components	free from silicone and halogen
Flammability rating according to UL 94	V2
Material	PA
Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
Number of individual labels	48
Number of individual labels per row	6
RoHS compliant	Yes
Printability	UV LED technology
Device	5147999 BLUEMARK CLED
Test for substances that would hinder coating with paint or varnish	VW PV 3.10.7:2005-02
Result	Test passed
Test specification weathering-resistance	Following ISO 4892-2:2013-03
Test duration	96 h
Wipe resistance test result	Test passed
Salt spray test specification	DIN EN 60068-2-11:2000-02
Test duration	96 h
Salt spray testing result	Test passed
Wipe resistance of test specification inscriptions	DIN EN 61010-1 (VDE 0411-1):2011-07
Result	Test passed
Marking mounting type	Snap into tall marker groove

### Standards and Regulations

Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
Flammability rating according to UL 94	V2

## Drawings

### Schematic diagram

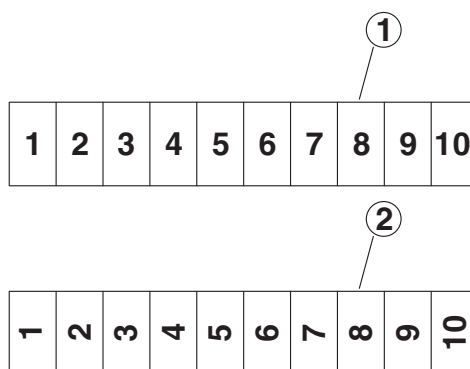

- ① Horizontal
- ② Vertical

## Marker for terminal blocks - UC-TM 10 CUS - 0824605

### Classifications

#### eCl@ss

eCl@ss 4.0	24190218
eCl@ss 4.1	24190218
eCl@ss 5.0	27141137
eCl@ss 5.1	27141137
eCl@ss 6.0	27141137
eCl@ss 7.0	27141137
eCl@ss 8.0	27141137
eCl@ss 9.0	27141137

#### ETIM

ETIM 2.0	EC000761
ETIM 3.0	EC000761
ETIM 4.0	EC000761
ETIM 5.0	EC000761
ETIM 6.0	EC000761

#### UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39131505