

D-SUB contact insert - CUC-DSI-J1STZ-S/DSRCB9 - 1418742

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



D-SUB contact insert, Number of positions: 9, Material: Steel, tin-plated, Connection method: Flat-ribbon cable connection, Size of housing: 1, with strain relief clamp

Why buy this product

- Various connection methods for every application
- Standard-compliant pin connector pattern

Key Commercial Data

Packing unit	10 STK
GTIN	
GTIN	4055626150086

Technical data

Mechanical characteristics

Standards/specifications	DIN 41652
Number of positions	9
Connection profile	D-SUB 9
Insertion/withdrawal cycles	>= 200
Connection method	Flat-ribbon cable connection
Mounting type	4-40 UNC thread
Type	09
Size of housing	1

Ambient conditions

Ambient temperature (operation)	-55 °C ... 125 °C
---------------------------------	-------------------

Material data

Flammability rating according to UL 94	V0
Housing material	Steel, tin-plated

D-SUB contact insert - CUC-DSI-J1STZ-S/DSRCB9 - 1418742

Technical data

Material data

Contact carrier material	Polyester GF
Contact material	Copper alloy
Contact surface material	0.2 µm, gold over nickel

Electrical characteristics

Number of positions	9
Rated current	1.5 A

Standards and Regulations


Standards/regulations	DIN 41652
Flammability rating according to UL 94	V0

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Schematic diagram

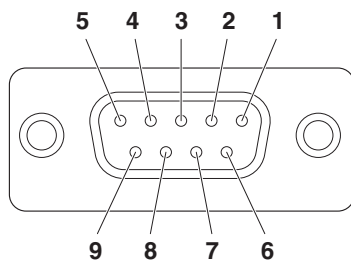

Dimensional drawing

