

D-SUB contact insert - CUC-DSI-C1STZ-S/DSLSC9 - 1418717

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


D-SUB contact insert, Number of positions: 9, Material: Steel, Connection method: Solder pins



Why buy this product

- Various connection methods for every application
- UL-approved contact inserts
- Standard-compliant pin connector pattern

Key Commercial Data

Packing unit	10 STK
GTIN	 4 055626 149639
GTIN	4055626149639

Technical data

Mechanical characteristics

Standards/specifications	DIN 41652
Number of positions	9
Number of slots	1
Insertion/withdrawal cycles	200
Connection method	Solder pins
Type of contact	D-SUB
Insertion force per signal contact	≤ 3.40 N
Mounting type	3 mm hole
Type	09

Ambient conditions

Ambient temperature (operation)	-55 °C ... 125 °C
---------------------------------	-------------------

Material data

D-SUB contact insert - CUC-DSI-C1STZ-S/DSLSC9 - 1418717

Technical data

Material data

Flammability rating according to UL 94	V0
Housing material	Steel
Housing surface material	tin-plated
Contact carrier material	PBT-GF
Contact material	Copper alloy
Contact surface material	0.1 µM gold over 1.2 µm nickel

Electrical characteristics

Number of positions	9
Rated current	5 A
Degree of pollution	2

Standards and Regulations


Standards/regulations	DIN 41652
Flammability rating according to UL 94	V0

Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Schematic diagram



Dimensional drawing

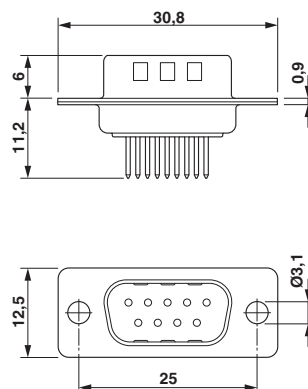

D-SUB contact insert

Approvals

Approvals

Approvals

UL Recognized

D-SUB contact insert - CUC-DSI-C1STZ-S/DSLSC9 - 1418717

Approvals

Ex Approvals

Approval details

UL Recognized



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>

FILE E 118976

Phoenix Contact 2017 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>