

Base strip - MSTBO 2,5/ 3-G1PL GY7035 - 2200328


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Header, nominal current: 16 A, rated voltage (III/2): 320 V, number of positions: 3, pitch: 5 mm, Color: light gray, mounting: Soldering

Why buy this product

- Headers and plugs for ME and ME MAX electronics housing
- Plug-in direction orthogonal to the PCB
- 5 mm pitch
- 2 to 4-pos.
- Touch proof
-

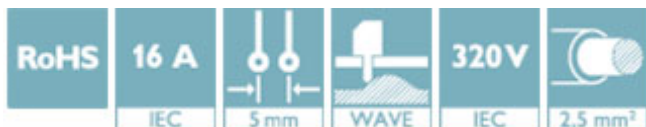

Key Commercial Data

Packing unit	50 STK
GTIN	
GTIN	4046356566339

Technical data

Dimensions

Pitch	5 mm
Dimension a	10.00 mm
Pin dimensions	1 x 1 mm
Pin spacing	5.00 mm
Hole diameter	1.4 mm

General

Range of articles	MSTBO 2,5/..-G1PL
Insulating material group	I
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV

Base strip - MSTBO 2,5/ 3-G1PL GY7035 - 2200328

Technical data

General

Rated surge voltage (II/2)	4 kV
Rated voltage (III/3)	250 V
Rated voltage (III/2)	320 V
Rated voltage (II/2)	400 V
Connection in acc. with standard	EN-VDE
Nominal current I _N	16 A
Maximum load current	16 A
Insulating material	PA
Flammability rating according to UL 94	V0
Color	light gray
Number of positions	3

Standards and Regulations

Connection in acc. with standard	EN-VDE
	CUL
Flammability rating according to UL 94	V0

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Approvals

Approvals

Approvals

EAC / IEC EE CB Scheme / VDE report with production monitoring


Ex Approvals


Approval details

EAC		B.01742
-----	---	---------

Base strip - MSTBO 2,5/ 3-G1PL GY7035 - 2200328

Approvals

IECEE CB Scheme		http://www.iecee.org/	DE1-57578
Nominal current I _N		16 A	
Nominal voltage U _N		320 V	

VDE report with production monitoring		http://www.vde.com/en/Institute/OnlineService/VDE-approved-products/Pages/Online-Search.aspx	40044868
Nominal current I _N		16 A	
Nominal voltage U _N		320 V	

Phoenix Contact 2017 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>