

Base strip - MSTBO 2,5/ 2-G1PL GY7035 - 2200330


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Header, nominal current: 16 A, rated voltage (III/2): 320 V, number of positions: 2, pitch: 5 mm, Color: light gray, mounting: Soldering

Why buy this product

- Headers and plugs for ME and ME MAX electronics housing
- Plug-in direction orthogonal to the PCB
- 5 mm pitch
- 2 to 4-pos.
- Touch proof
-

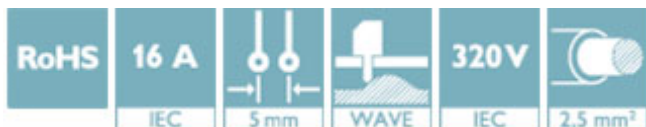

Key Commercial Data

Packing unit	50 STK
GTIN	
GTIN	4046356566162

Technical data

Dimensions

Pitch	5 mm
Dimension a	5.00 mm
Pin dimensions	1 x 1 mm
Pin spacing	5.00 mm
Hole diameter	1.4 mm

General

Range of articles	MSTBO 2,5/..-G1PL
Insulating material group	I
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV

Base strip - MSTBO 2,5/ 2-G1PL GY7035 - 2200330

Technical data

General

Rated surge voltage (II/2)	4 kV
Rated voltage (III/3)	250 V
Rated voltage (III/2)	320 V
Rated voltage (II/2)	400 V
Connection in acc. with standard	EN-VDE
Nominal current I _N	16 A
Maximum load current	16 A
Insulating material	PA
Flammability rating according to UL 94	V0
Color	light gray
Number of positions	2

Standards and Regulations

Connection in acc. with standard	EN-VDE
	CUL
Flammability rating according to UL 94	V0

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Approvals


Approvals

Approvals

UL Recognized / cUL Recognized / EAC / IECCE CB Scheme / VDE report with production monitoring / cULus Recognized


Ex Approvals

Approval details


UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
	B	D	
Nominal current I _N	15 A	10 A	
Nominal voltage U _N	300 V	300 V	


Base strip - MSTBO 2,5/ 2-G1PL GY7035 - 2200330

Approvals

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 60425
		B	D
Nominal current IN		15 A	10 A
Nominal voltage UN		300 V	300 V

EAC		B.01742
-----	---	---------

IECEE CB Scheme		http://www.iecee.org/	DE1-57578
Nominal current IN		16 A	
Nominal voltage UN		320 V	

VDE report with production monitoring		http://www.vde.com/en/Institute/OnlineService/VDE-approved-products/Pages/Online-Search.aspx	40044868
Nominal current IN		16 A	
Nominal voltage UN		320 V	

cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm
------------------	---	---

Phoenix Contact 2017 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
 Flachsmarktstr. 8
 32825 Blomberg
 Germany
 Tel. +49 5235 300
 Fax +49 5235 3 41200
<http://www.phoenixcontact.com>