

Crimp contact - CC1,0-TS-1,00F AU - 1423646

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Crimp contact, Contact diameter: 1 mm, turned, Socket, Material contact: CuZn, Contact surface: Ni/Au, Connection cross section: 0.34 mm² ... 1 mm²

RoHS

Key Commercial Data

Packing unit	100 STK
Minimum order quantity	100 STK
GTIN	 4 055626 363325
GTIN	4055626363325

Technical data

Electrical characteristics

Rated current	4 A
---------------	-----

Ambient conditions

Ambient temperature (operation)	-40 °C ... 85 °C
---------------------------------	------------------

Mechanical characteristics

Conductor cross section	0.34 mm ² ... 1 mm ²
Connection cross section AWG	22 ... 18
Stripping length of the individual wire	4 mm +0,5 mm
Insertion/withdrawal cycles	≥ 100

General

Type	Individual female contact
Connection method	Crimp connection


Material data

Contact material	CuZn
Contact surface material	Ni/Au

Crimp contact - CC1,0-TS-1,00F AU - 1423646

Drawings

Dimensional drawing

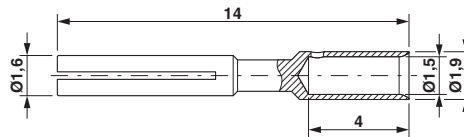

Crimp contact, diameter 1.0 mm

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC



EAC-Zulassung

Phoenix Contact 2017 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>