

# Contact insert - HC-B06-I-TPT-M - 1423015

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Contact insert, Size: B6, Number of positions: 6+PE, Male connector, Push-in connection, Number of connections per position: 2, 500 V, 10 A, 0.14 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, Application: Power

## Why buy this product

- For fast coding with plastic profile



## Key Commercial Data

Packing unit	1 STK
GTIN	
GTIN	4055626322582

## Technical data

### General

Note	For housing HC-B 6
Connection method	Push-in connection
Degree of pollution	3
Overvoltage category	III
Number of positions	6+PE
Insertion/withdrawal cycles	≥ 500
Size	B6
Conductor cross section	0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup> (with ferrule)
Connection cross section AWG	26 ... 16 (with ferrule)
Stripping length of the individual wire	8 mm ±1 mm
Assembly instructions	Coding also using the CP-HC (1686478) coding profiles. HC-B6../ HC-B10..for two coding profiles. HC-B16../ HC-B24..for four coding profiles.
Connection	Connectors may only be actuated when there is no load/voltage.

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

# Contact insert - HC-B06-I-TPT-M - 1423015

## Technical data

### Material data

Contact material	Copper alloy
Contact surface material	Ag
Contact carrier material	PC

### Electrical characteristics


Rated voltage (III/3)	500 V
Rated surge voltage	6 kV
Rated current	10 A

### Standards and Regulations

Constructional and testing regulations	DIN EN 61984
	DIN EN 60664
	IEC 60352
Flammability rating according to UL 94	V0


## Drawings

Schematic diagram




Connector pin assignment, connection side

Dimensional drawing

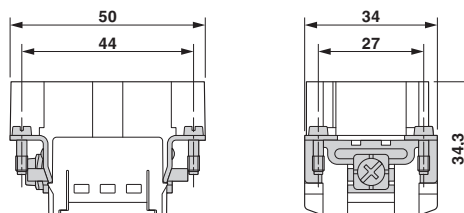

Dimensional drawing



Mounting cutout when used without housing

## Approvals

### Approvals

Approvals

EAC / CSA / UL Recognized


# Contact insert - HC-B06-I-TPT-M - 1423015


## Approvals

Ex Approvals

### Approval details

EAC		EAC-Zulassung
-----	---	---------------

CSA		<a href="http://www.csagroup.org/services/testing-and-certification/certified-product-listing/">http://www.csagroup.org/services/testing-and-certification/certified-product-listing/</a>	13631
mm <sup>2</sup> /AWG/kcmil	16		
Nominal current I <sub>N</sub>	11 A		
Nominal voltage U <sub>N</sub>	600 V		

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	E118976
mm <sup>2</sup> /AWG/kcmil	16		
Nominal current I <sub>N</sub>	14 A		
Nominal voltage U <sub>N</sub>	600 V		

Phoenix Contact 2017 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>