

## Marker for terminal blocks - UCT-TM 5 CUS - 0829595

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, Mounting type: Snap into tall marker groove, for terminal block width: 5.2 mm, Lettering field: 4.6 x 10.5 mm




### Why buy this product

- ✓ The markers, which are supplied in uniform sheets, can be labeled quickly, easily, and precisely using the THERMOMARK CARD and the BLUEMARK LED
- ✓ The multi-section marking strips are easy to fit and can be easily separated if required
- ✓ Labeling service: Phoenix Contact can custom-label all UniCard markers according to your requirements
- ✓ The UCT-TM... UniCard labeling range includes markers for products with tall marker grooves
- ✓ The sheets provide space for including function texts



### Key Commercial Data

Packing unit	1
GTIN	 4 046356 597449
GTIN	4046356597449
Custom tariff number	49119900

### Technical data

#### Dimensions

Width (a)	5 mm
-----------	------

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 120 °C
---------------------------------	-------------------

#### General

Note	Can be labeled via thermal transfer
------	-------------------------------------

## Marker for terminal blocks - UCT-TM 5 CUS - 0829595

### Technical data

#### General

Color	white
Type	high
Components	free from silicone and halogen
Flammability rating according to UL 94	V0
Material	PC
RoHS compliant	Yes
Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
Number of individual labels	72
Number of individual labels per row	12
Printability	Thermal transfer
	Inkjet printing
Device	5146464 THERMOMARK CARD
	5146480 THERMOMARK CARD-UCT-MAG1
	5147888 BLUEMARK LED
	5147999 BLUEMARK CLED
Ink ribbon	0801371 THERMOMARK-RIBBON 110-TC
	5147421 BLUEMARK FLUID-CARTRIDGE
	5146662 BLUEMARK CLED-FLUID-CARTR.
Test for substances that would hinder coating with paint or varnish	VW PV 3.10.7:2005-02
Result	Test passed
Test specification weathering-resistance	Following ISO 4892-2:2013-03
Test duration	96 h
Wipe resistance test result	Test passed
Salt spray test specification	DIN EN 60068-2-11:2000-02
Test duration	96 h
Salt spray testing result	Test passed
Wipe resistance of test specification inscriptions	DIN EN 61010-1 (VDE 0411-1):2011-07
Result	Test passed
Marking mounting type	Snap into tall marker groove
Result	Test passed
Oxygen index (DIN EN ISO 4589-2)	32.4 %
R22	HL 1 - HL 3
R23	HL 1 - HL 3
R24	HL 1 - HL 3

#### Standards and Regulations

Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
-----------------	-----------------------------

# Marker for terminal blocks - UCT-TM 5 CUS - 0829595


## Technical data

### Standards and Regulations

Flammability rating according to UL 94	V0
--	----

## Drawings

Schematic diagram

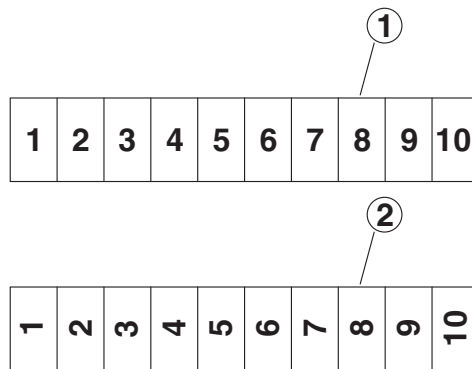

- ① Horizontal
- ② Vertical

## Classifications

### eCl@ss

eCl@ss 4.0	24190208
eCl@ss 4.1	24190208
eCl@ss 5.0	27149103
eCl@ss 5.1	27141137
eCl@ss 6.0	27141137
eCl@ss 7.0	27141137
eCl@ss 8.0	27141137
eCl@ss 9.0	27141137

### ETIM

ETIM 3.0	EC000761
ETIM 4.0	EC000761
ETIM 5.0	EC000761
ETIM 6.0	EC000761

### UNSPSC

UNSPSC 6.01	30211811
-------------	----------

## Marker for terminal blocks - UCT-TM 5 CUS - 0829595

### Classifications

#### UNSPSC

UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39131505