

FRONT-MSTB 2,5/ 4-ST BKLPL:24V - 1001700

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


PCB connector, number of positions: 4, pitch: 5 mm, connection method: Front screw connection, color: black, contact surface: Tin



The figure shows a 10-position version of the product

Your advantages

- ✓ Well-known connection principle allows worldwide use
- ✓ Optimized for tight installation situations: operation and conductor connection from one direction
- ✓ Low temperature rise, thanks to maximum contact force
- ✓ Allows connection of two conductors

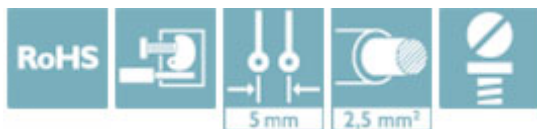

Key Commercial Data

Packing unit	1
GTIN	 4 055626 469287
GTIN	4055626469287
Custom tariff number	85366990

Technical data

Dimensions

Length [l]	27.2 mm
Width [w]	20 mm
Height [h]	15 mm
Pitch	5 mm
Dimension a	15 mm

General

Range of articles	FRONT-MSTB 2,5/...-ST
Number of positions	4
Connection method	Front screw connection
Nominal cross section	2.5 mm²

FRONT-MSTB 2,5/ 4-ST BKLPL:24V - 1001700

Technical data

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Classifications

eCl@ss

eCl@ss 5.1	27260700
eCl@ss 6.0	27260700
eCl@ss 7.0	27440309
eCl@ss 8.0	27440309
eCl@ss 9.0	27440309

ETIM

ETIM 5.0	EC002638
ETIM 6.0	EC002638