

Nut - FT NUT M25 GN - 1049830

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Circular connectors (device-side), Nut, color: green

Product Description

Nut for color-coding device interfaces



Key Commercial Data

| | |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit | 10 pc |
| Minimum order quantity | 10 pc |
| GTIN |  4 055626 661575 |
| GTIN | 4055626661575 |
| Weight per Piece (excluding packing) | 22.220 g |
| Custom tariff number | 39269097 |
| Country of origin | Poland |

Technical data

General data

| | |
|-------|-------|
| Color | green |
|-------|-------|

Connection data

| | |
|------------------------|--------|
| Torque | 2.5 Nm |
| Wrench size, union nut | 34 mm |


Environmental Product Compliance

| | |
|------------|---------------------------------------------------------|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Drawings

Nut - FT NUT M25 GN - 1049830

Dimensional drawing

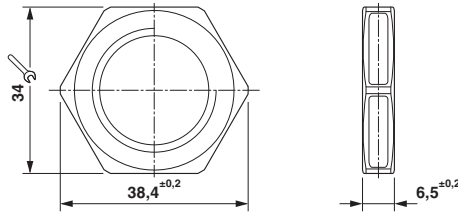

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 8.0 | 27440102 |
| eCl@ss 9.0 | 27440103 |

ETIM

| | |
|----------|----------|
| ETIM 5.0 | EC002061 |
| ETIM 6.0 | EC002061 |

Accessories

Accessories

Circular connectors (device side)

Device connector, rear mounting - PRC 5-FT25-MC WO NUT - 1627609



Circular connectors (device-side), Device connector, rear mounting, Housing material: PPE, color: black, number of positions: 5, nom. voltage: 690 V AC, Rated current: 35 A, Connection method: Crimp connection, Type of contact: Pin

Device connector, rear mounting - PRC 3-FT25-MC WO NUT - 1627608



Circular connectors (device-side), Device connector, rear mounting, Housing material: PPE, color: black, number of positions: 3, nom. voltage: 690 V AC, Rated current: 35 A, Connection method: Crimp connection, Type of contact: Pin