

# Housing - HC-STA-B24-HHFD-1STM40-EL-AL - 1412751

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Sleeve housing B24, for double locking latch, material: Die-cast aluminum, salt water resistant, cable outlets: 1, lateral, height: 76 mm, cable gland: none, support sleeve: no, 1x M40, Standard

## Your advantages

- good shielding in the event of electromagnetic interference



## Key Commercial Data

|                                      |   |
|--------------------------------------|---|
| Packing unit                         | 1 pc  |
| GTIN                                 | <br>4 055626 060163 |
| GTIN                                 | 4055626060163   |
| Weight per Piece (excluding packing) | 267.500 g   |
| Custom tariff number                 | 85389099  |
| Country of origin                    | Poland  |

## Technical data

### Dimensions

|        |        |
|--------|--------|
| Height | 76 mm  |
| Width  | 44 mm  |
| Length | 120 mm |

### Ambient conditions

|  |                   |
|--|-------------------|
| Degree of protection of housing (IP)   | IP66              |
|  | IP67              |
| Degree of protection of housing (NEMA) | 4 (UL 50e)        |
|  | 4X (UL 50e)       |
|  | 12 (UL 50e)       |
| Ambient temperature (operation)        | -40 °C ... 125 °C |

# Housing - HC-STA-B24-HHFD-1STM40-EL-AL - 1412751

## Technical data

### General


|                              |  |
|------------------------------|--|
| Note                         | for contact inserts HC-B24, BB46, D64, DD108, HV10/16, M |
| Size                         | B24  |
| Housing type                 | Sleeve housing   |
| Color                        | gray aluminum  |
| Locking type                 | for double locking latch                                 |
| No. of cable outlets         | 1  |
| Cable outlet                 | lateral  |
| Screw connection             | none   |
| Type of the screw connection | 1x M40   |
| Housing material             | Die-cast aluminum, salt water resistant                  |
| Housing surface material     | uncoated   |

### Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

## Drawings

Dimensional drawing

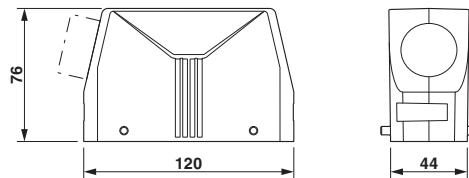

Dimensional drawing

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 5.1 | 27261200 |
| eCl@ss 6.0 | 27261200 |
| eCl@ss 7.0 | 27440202 |
| eCl@ss 8.0 | 27440202 |
| eCl@ss 9.0 | 27440202 |

### ETIM

|          |          |
|----------|----------|
| ETIM 5.0 | EC000437 |
| ETIM 6.0 | EC000437 |

# Housing - HC-STA-B24-HHFD-1STM40-EL-AL - 1412751

## Classifications

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 13.2 | 31261501 |
|-------------|----------|

## Approvals

### Approvals



### Approvals

GL / UL Recognized / cUL Recognized / EAC / cULus Recognized



### Ex Approvals



## Approval details

|    |  |   |            |
|----|--|---|------------|
| GL |  | <a href="http://exchange.dnv.com/tari/">http://exchange.dnv.com/tari/</a> | 6196614 HH |
|----|--|---|------------|

|               |  |   |         |
|---------------|--|---|---------|
| UL Recognized |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E255026 |
|---------------|--|---|---------|

|                |  |   |         |
|----------------|--|---|---------|
| cUL Recognized |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E255026 |
|----------------|--|---|---------|

|     |  |  |                          |
|-----|--|--|--------------------------|
| EAC |  |  | RU C-<br>DE.AI30.B.01102 |
|-----|--|--|--------------------------|

|                  |  |  |  |
|------------------|--|--|--|
| cULus Recognized |  |  |  |
|------------------|--|--|--|

## Accessories

### Accessories

Full screw connection

## Housing - HC-STA-B24-HHFD-1STM40-EL-AL - 1412751

### Accessories

Cable gland - G-INS-M40-M68N-NNES-S - 1411167



Cable gland, cable gland material: Nickel-plated brass, external cable diameter 19 mm ... 28 mm, shielding: no, connecting thread: M40 x 1.5, color: silver, with O-ring

---

Cable gland - G-INSEC-M40-M68N-NCRS-S - 1411192



Cable gland, cable gland material: Nickel-plated brass, external cable diameter 19 mm ... 27 mm, shielding: yes, connecting thread: M40 x 1.5, color: silver, with O-ring

---

### Labeled device marker

Plastic label - US-EMLP (20X9) CUS - 0830085



Plastic label, can be ordered: By card, white, labeled according to customer specifications, mounting type: adhesive, lettering field size: 20 x 9 mm

---

### Protective cover

Protective covers - HC-B24-HCLWD-PLR-BK - 1414640



Protective cover B24, with double locking latch, protective cover material: PA, height: 21.6 mm, seal: yes, diameter of retaining cord eyelet: 30 mm

---