

Protective covers - HC-B 16-SD-MQT/FS-AL - 1584554

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Protective cover B16, with double locking latch, protective cover material: Al, height: 16.9 mm, seal: yes, With lanyard, diameter of retaining cord eyelet: 30 mm



Key Commercial Data

Packing unit	10 pc
GTIN	
GTIN	4046356145060
Weight per Piece (excluding packing)	115.920 g
Custom tariff number	85389099
Country of origin	Germany

Technical data

Dimensions

Length	93.5 mm
Width	43 mm
Height	16.9 mm
Diameter of retaining cord eyelet	30 mm

Ambient conditions

Degree of protection	IP66
Ambient temperature (operation)	-40 °C ... 125 °C

General

Size	B16
Type	for sleeve housing without double locking latch
Material	Aluminum, die-cast
Seal material	NBR
Locking latch material	High-grade steel, handle: PA-GF
Color	gray

Protective covers - HC-B 16-SD-MQT/FS-AL - 1584554

Technical data

General


Seal present	yes
Assembly instructions	Not for HC-B...EMC housings
Connection	The guide pins of the protective cover must be removed when using coding sockets, pins, and bolts.

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

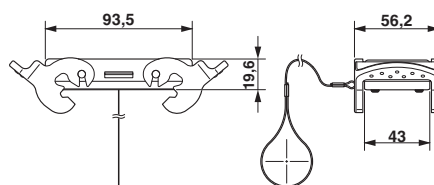

Dimensional drawing

Classifications

eCl@ss

eCl@ss 4.0	27141210
eCl@ss 4.1	27141210
eCl@ss 5.0	27149110
eCl@ss 5.1	27149100
eCl@ss 6.0	27261200
eCl@ss 7.0	27440208
eCl@ss 8.0	27440208
eCl@ss 9.0	27440208

ETIM

ETIM 2.0	EC000241
ETIM 3.0	EC002040
ETIM 4.0	EC002314
ETIM 5.0	EC002314
ETIM 6.0	EC002314

UNSPSC

UNSPSC 6.01	30212113
UNSPSC 7.0901	39121712

Protective covers - HC-B 16-SD-MQT/FS-AL - 1584554

Classifications

UNSPSC

UNSPSC 11	39121712
UNSPSC 12.01	39121712
UNSPSC 13.2	39121421

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		RU C- DE.AI30.B.01102
-----	---	--------------------------