

D-SUB contact insert - CUC-DSI-J1STZ-S/DSRCB25 - 1418745

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

D-SUB contact insert, number of positions: 25, connection method: Flat-ribbon cable connection, size of housing: 3, with strain relief clamp



RoHS

Key Commercial Data

Packing unit	10 pc
Minimum order quantity	10 pc
GTIN	 4 055626 150109
GTIN	4055626150109
Weight per Piece (excluding packing)	19.470 g
Custom tariff number	85366990
Country of origin	Germany

Technical data

Mechanical characteristics

Standards/specifications	DIN 41652
Number of positions	25
Connection profile	25-pos. D-SUB
Insertion/withdrawal cycles	>= 200
Connection method	Flat-ribbon cable connection
Mounting type	4-40 UNC thread
Type	25
Size of housing	3

Ambient conditions

Ambient temperature (operation)	-55 °C ... 125 °C
---------------------------------	-------------------

Material data

Flammability rating according to UL 94	V0
--	----

D-SUB contact insert - CUC-DSI-J1STZ-S/DSRCB25 - 1418745

Technical data

Electrical characteristics

Number of positions	25
Rated current	1.5 A

Standards and Regulations


Standards/regulations	DIN 41652
Flammability rating according to UL 94	V0

Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Schematic diagram

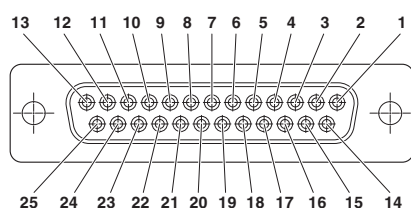

Dimensional drawing

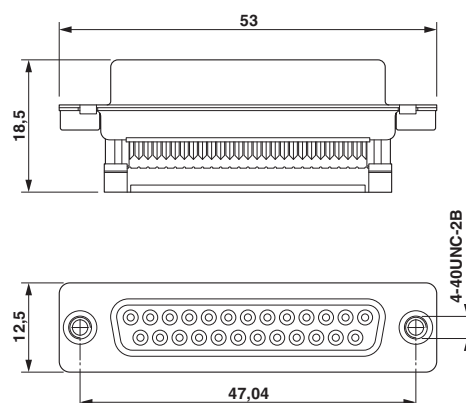

Classifications

eCl@ss

eCl@ss 4.0	27140816
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260700
eCl@ss 6.0	27260700
eCl@ss 7.0	27440302
eCl@ss 8.0	27440302
eCl@ss 9.0	27440302

ETIM

ETIM 2.0	EC000438
ETIM 3.0	EC000438
ETIM 4.0	EC000438
ETIM 5.0	EC001132

D-SUB contact insert - CUC-DSI-J1STZ-S/DSRCB25 - 1418745

Classifications

ETIM

ETIM 6.0	EC001132
----------	----------

UNSPSC

UNSPSC 6.01	30211923
UNSPSC 7.0901	39121522
UNSPSC 11	39121522
UNSPSC 12.01	39121522
UNSPSC 13.2	39121522

Accessories

Accessories

Panel mounting frame

D-SUB panel mounting frames - VS-25-A - 1689750



D-SUB panel mounting frame, shell size 3, IP67 degree of protection