

## Sensor/actuator cable - SAC-4P- 1,5-PVC/M 8FS - 1415550

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Sensor/actuator cable, 4-position, PVC, black RAL 9005, free cable end, on Socket straight M8, cable length: 1.5 m

### Your advantages

- Easy and safe: 100% electrically tested plug-in components

### Key Commercial Data

|                                      |   |
|--------------------------------------|---|
| Packing unit                         | 1 pc  |
| GTIN                                 | <br>4 055626 049342 |
| GTIN                                 | 4055626049342   |
| Weight per Piece (excluding packing) | 38.880 g  |
| Custom tariff number                 | 85444290  |
| Country of origin                    | Germany   |

### Technical data

#### Dimensions

|                 |       |
|-----------------|-------|
| Length of cable | 1.5 m |
|-----------------|-------|

#### Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection            | IP65                             |
|                                 | IP67                             |
|                                 | IP68                             |

#### General

|                       |         |
|-----------------------|---------|
| Rated current at 40°C | 4 A     |
| Rated voltage         | 48 V AC |
|                       | 60 V DC |
| Number of positions   | 4       |

# Sensor/actuator cable - SAC-4P- 1,5-PVC/M 8FS - 1415550

## Technical data

### General

|                              |                              |
|------------------------------|------------------------------|
| Insulation resistance        | ≥ 100 MΩ                     |
| Coding                       | A - standard                 |
| Standards/regulations        | M8 connector IEC 61076-2-104 |
| Status display               | No                           |
| Protective circuit/component | unwired                      |
| Overvoltage category         | II                           |
| Degree of pollution          | 3                            |
| Insertion/withdrawal cycles  | ≥ 100                        |

### Material

|  |   |
|--|---|
| Flammability rating according to UL 94 | HB  |
| Contact material                       | CuSn  |
| Contact surface material               | Ni/Au                                       |
| Contact carrier material               | TPU GF                                      |
| Material of grip body                  | TPU, hardly inflammable, self-extinguishing |
| Material, knurls                       | Zinc die-cast, nickel-plated                |
| Sealing material                       | NBR   |

### Standards and Regulations

|  |                 |
|--|-----------------|
| Standard designation                   | M8 connector    |
| Standards/regulations                  | IEC 61076-2-104 |
| Flammability rating according to UL 94 | HB              |

### Cable

|                                    |                                       |
|------------------------------------|---------------------------------------|
| Cable type                         | PVC black                             |
| Cable type (abbreviation)          | PVC                                   |
| Cable abbreviation                 | LiYY                                  |
| Conductor cross section            | 4x 0.25 mm <sup>2</sup> (Signal line) |
| AWG signal line                    | 24                                    |
| Conductor structure signal line    | 14x 0.15 mm                           |
| Core diameter including insulation | 1.17 mm ±0.05 mm                      |
| Thickness, insulation              | ≥ 0.23 mm (Core insulation)           |
|                                    | ≥ 0.76 mm (Outer cable sheath)        |
| Wire colors                        | brown, white, blue, black             |
| Overall twist                      | 4 wires, twisted                      |
| External sheath, color             | black RAL 9005                        |
| External cable diameter D          | 4.4 mm ±0.15 mm                       |
| Cable weight                       | 33 kg/km                              |
| Outer sheath, material             | PVC                                   |
| Material conductor insulation      | PVC                                   |
| Conductor material                 | Bare Cu litz wires                    |
| Insulation resistance              | ≥ 100 MΩ*km (at 20 °C)                |

# Sensor/actuator cable - SAC-4P- 1,5-PVC/M 8FS - 1415550

## Technical data

### Cable


|                                 |   |
|---------------------------------|---|
| Conductor resistance            | max. 79 Ω/km (at 20 °C)                         |
| Nominal voltage, cable          | ≤ 300 V   |
| Test voltage, cable             | ≥ 3000 V  |
| Flame resistance                | As per UL-Style 2464                            |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation)    |
|                                 | -25 °C ... 80 °C (cable, flexible installation) |

### Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |


## Drawings

Schematic diagram




Pin assignment M8 socket, 4-pos., view female side

Cable cross section




PVC black [PVC]

Dimensional drawing



Socket M8 x 1, straight

Circuit diagram

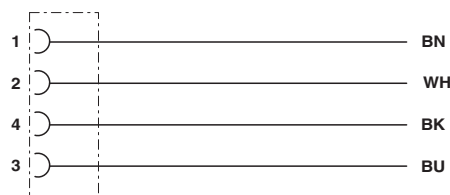

Contact assignment of M8/M12 plugs/sockets

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 5.1 | 27061800 |
| eCl@ss 6.0 | 27279200 |
| eCl@ss 7.0 | 27279218 |
| eCl@ss 8.0 | 27279218 |
| eCl@ss 9.0 | 27060311 |

# Sensor/actuator cable - SAC-4P- 1,5-PVC/M 8FS - 1415550

## Classifications

### ETIM

|          |          |
|----------|----------|
| ETIM 5.0 | EC001855 |
| ETIM 6.0 | EC001855 |

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 13.2 | 31251501 |
|-------------|----------|

## Approvals


### Approvals


#### Approvals


UL Listed / cUL Listed / EAC / cULus Listed


#### Ex Approvals

### Approval details

|                    |   |   |               |
|--------------------|---|---|---------------|
| UL Listed          |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 221474 |
| Nominal voltage UN |   | 30 V  |               |
| Nominal current IN |   | 4 A   |               |

|                    |   |   |               |
|--------------------|---|---|---------------|
| cUL Listed         |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 221474 |
| Nominal voltage UN |   | 30 V  |               |
| Nominal current IN |   | 4 A   |               |

|     |   |                          |
|-----|---|--------------------------|
| EAC |  | RU C-<br>DE.AI30.B.00767 |
|-----|---|--------------------------|

|              |   |
|--------------|---|
| cULus Listed |  |
|--------------|---|

## Sensor/actuator cable - SAC-4P- 1,5-PVC/M 8FS - 1415550

### Accessories

#### Accessories

#### Conductor marking

##### Insert label - PABA WH/23 - 1013779



Insert label, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, mounting type: thread on, cable diameter range: 1.5 - 35 mm, lettering field size: 23 x 4 mm

---

##### Insert label - PABA YE/23 - 1013782



Insert label, Strip, yellow, unlabeled, can be labeled with: CMS-P1-PLOTTER, mounting type: thread on, cable diameter range: 1.5 - 35 mm, lettering field size: 23 x 4 mm

---

##### Insert label - PABA WH/15 - 1013151



Insert label, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, mounting type: thread on, cable diameter range: 0.6 - 50 mm, lettering field size: 15 x 4 mm

---

##### Insert label - PABA YE/15 - 1013698



Insert label, Strip, yellow, unlabeled, can be labeled with: CMS-P1-PLOTTER, mounting type: thread on, cable diameter range: 0.6 - 50 mm, lettering field size: 15 x 4 mm

---

##### Insert label - PABA RD/15 - 1013944



Insert label, Strip, red, unlabeled, can be labeled with: CMS-P1-PLOTTER, mounting type: thread on, cable diameter range: 0.6 - 50 mm, lettering field size: 15 x 4 mm

---

#### Corrugated pipe

## Sensor/actuator cable - SAC-4P- 1,5-PVC/M 8FS - 1415550

### Accessories

Protective hose - WP-PA HF 13,0 BK - 3240681



Polyamide protective hose, inflammability class V0, UV resistant

---

Protective hose - WP-PA HF-HB 13,0 BK - 3240839



Polyamide protective hose, inflammability class HB, UV resistant

---

### Cutting tools

Diagonal cutter - CUTFOX-S VDE - 1212207



Diagonal cutter for hard (piano wire) and soft wires, VDE 1000 V AC/1500 V DC tested

---

### Marker carrier cable

Conductor marker carrier - PATG 2/15 - 1013038



Conductor marker carrier, transparent, unlabeled, mounting type: slide on, cable diameter range: 2 - 4 mm, lettering field size: 15 x 4 mm

---

Conductor marker carrier - PATG 3/15 - 1013041



Conductor marker carrier, transparent, unlabeled, mounting type: slide on, cable diameter range: 4 - 7 mm, lettering field size: 15 x 4 mm

---

## Sensor/actuator cable - SAC-4P- 1,5-PVC/M 8FS - 1415550

### Accessories

Conductor marker carrier - PATG 4/15 - 1013054



Conductor marker carrier, transparent, unlabeled, mounting type: slide on, cable diameter range: 6 - 10 mm, lettering field size: 15 x 4 mm

---

### Marker pen

Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

---

### Protective cap

Screw plug - PROT-M 8 MS-PA-CHAIN - 1430860



M8 sealing cap made of plastic with fixing band for sensor cables, for M8 sockets

---

### Screwdriver tools

Tool - SAC BIT M8-D10 - 1208461



Nut for assembling M8 connectors with longitudinal knurl and a knurl diameter of 10 mm, for 4 mm hexagonal drive

---

### Stripping tool

Stripping tool - WIREFOX SAC-1 - 1212757



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from  $\varnothing$  of 3.2 to 4.4 mm, any stripping length

## Sensor/actuator cable - SAC-4P- 1,5-PVC/M 8FS - 1415550

### Accessories

Stripping tool - WIREFOX SAC - 1212623



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from  $\varnothing$  of 4.4 to 7 mm, any stripping length

---

Stripping tool - WIREFOX 10 - 1212150



Stripping tool, for cables and conductors from 0.02 - 10 mm<sup>2</sup>, self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm<sup>2</sup> stranded/1.5 mm<sup>2</sup> solid, replaceable stripping blade

---

### Torque tool

Torque screwdriver - TSD 02 SAC - 1208487



Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors

---

Protective hose adapter - WP-CTA POM 13,0 BK - 1422884



Protective hose adapter, for corrugated hoses with a nominal size of 13 (10 x 13), corrugated in parallel

---