

## Relay Module - EMG 22-REL/KSR-230/21/AU/SO46 - 2940061

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Relay interfaces against interference on the control side, with soldered-in miniature switching relays, contacts (Au): small loads, 1 PDT, input voltage 230 V AC

### Your advantages

- ✓ Use of AC output cards, resulting in residual AC currents
- ✓ Resistant to interference currents
- ✓ High relay release voltage
- ✓ Applications with long control lines



### Key Commercial Data

Packing unit	10 pc
GTIN	 4 017918 079840
GTIN	4017918079840
Weight per Piece (excluding packing)	70.370 g
Custom tariff number	85364900
Country of origin	Germany

### Technical data

#### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

#### Dimensions

Width	22.5 mm
Height	75 mm
Depth	62.5 mm

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 40 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

# Relay Module - EMG 22-REL/KSR-230/21/AU/SO46 - 2940061

## Technical data

### Coil side

Nominal input voltage $U_N$	230 V AC
Input voltage range in reference to $U_N$	0.9 ... 1.1
Typical input current at $U_N$	18 mA
Typical response time	10 ms
Typical release time	8 ms
Protective circuit	Bridge rectifier Bridge rectifier
	Surge protection Varistor
	RC element RC element
Operating voltage display	Yellow LED
Power dissipation for nominal condition	4.14 W

### Contact side

Contact type	Double contact, 1 PDT
Type of switch contact	Double contact
Contact material	AgPd60, hard gold-plated
Maximum switching voltage	30 V AC
	36 V DC
Maximum inrush current	0.2 A
Limiting continuous current	0.5 A
Interrupting rating (ohmic load) max.	5 W (at 24 V DC)

### Contact side (with destroyed gold layer)

Note	the following values are applicable if a gold layer is destroyed
Maximum switching voltage	125 V AC
	150 V DC
Limiting continuous current	2 A
Maximum inrush current	2 A
Interrupting rating (ohmic load) max.	29 W (at 24 V DC)
	29 W (at 48 V DC)
	29 W (at 60 V DC)

### General

Test voltage relay winding/relay contact	2.5 kV AC (50 Hz, 1 min.)
Mechanical service life	approx. $2 \times 10^7$ cycles
Mounting position	any

### Connection data input side

Connection name	Coil side
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section solid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>

# Relay Module - EMG 22-REL/KSR-230/21/AU/SO46 - 2940061

## Technical data

### Connection data input side

Conductor cross section AWG	24 ... 12
-----------------------------	-----------

### Connection data output side

Connection name	Contact side
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Conductor cross section solid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 12

### Standards and Regulations


Standards/regulations	IEC 60664
	EN 50178
Insulation	Basic insulation
Degree of pollution	2
Overvoltage category	III

### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

## Drawings

Circuit diagram

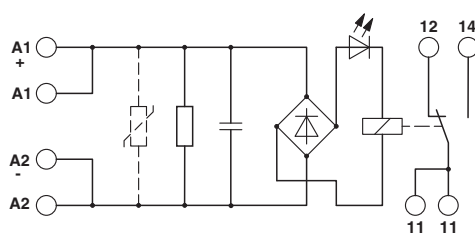

## Classifications

### eCl@ss

eCl@ss 5.0	27371601
eCl@ss 5.1	27371600
eCl@ss 6.0	27371600
eCl@ss 7.0	27371601
eCl@ss 8.0	27371601

## Relay Module - EMG 22-REL/KSR-230/21/AU/SO46 - 2940061

### Classifications

#### eCl@ss

eCl@ss 9.0	27371601
------------	----------

#### ETIM

ETIM 2.0	EC001437
ETIM 3.0	EC001437
ETIM 4.0	EC001437
ETIM 5.0	EC001437
ETIM 6.0	EC001437

#### UNSPSC

UNSPSC 6.01	30211916
UNSPSC 7.0901	39121515
UNSPSC 11	39121515
UNSPSC 12.01	39121515
UNSPSC 13.2	39122334

### Approvals

#### Approvals

#### Approvals

#### EAC

#### Ex Approvals

#### Approval details

EAC		RU C- DE.A*30.B.01082
-----	---	--------------------------