

Single relay - REL-PR3- 24AC/3X1 - 2903707

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Plug-in high-power relay with power contacts, 3 N/O contacts, coil voltage: 24 V AC



Key Commercial Data

| | |
|--------------------------------------|---------------|
| Packing unit | 1 pc |
| GTIN | |
| GTIN | 4046356759199 |
| Weight per Piece (excluding packing) | 83.200 g |
| Custom tariff number | 85364190 |
| Country of origin | Poland |

Technical data

Dimensions

| | |
|--------|---------|
| Width | 38.6 mm |
| Height | 36.1 mm |
| Depth | 45.5 mm |

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | -40 °C ... 55 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |

Coil side

| | |
|---|--|
| Nominal input voltage U_N | 24 V AC |
| Input voltage range in reference to U_N | see diagram |
| Mains frequency | 50/60 Hz |
| Typical input current at U_N | 116 mA |
| Typical response time | 5 ms ... 25 ms (depending on phase relation) |
| Typical release time range | 5 ms ... 20 ms (depending on phase relation) |

Single relay - REL-PR3- 24AC/3X1 - 2903707

Technical data

Coil side

| | |
|---|--------|
| Power dissipation for nominal condition | 2.78 W |
|---|--------|

Contact side

| | |
|---|---|
| Contact type | 3 N/O contacts |
| Type of switch contact | Single contact |
| Contact material | AgNi |
| Maximum switching voltage | 440 V AC 250 V DC |
| Minimum switching voltage | 10 V (At 24 mA) |
| Min. switching current | 10 mA (at 24 V) |
| Maximum inrush current | 50 A (20 ms, N/O contact) |
| Limiting continuous current | 16 A |
| Interrupting rating (ohmic load) max. | 384 W (at 24 V DC) 720 W (at 48 V DC) 600 W (at 60 V DC) 660 W (at 110 V DC) 183 W (at 220 V DC) 4000 VA (for 250 V AC) 4000 VA (at 440 V AC) |
| Switching capacity | 1 A (at 24 V, DC13) 1 A (at 120 V, DC13) 1 A (at 220 V, DC13) 1.5 A (at 24 V, AC15) 1.5 A (at 120 V, AC15) 1.5 A (at 240 V, AC15) |
| Switching capacity according to IEC 60947-5-1 | 1 A (at 24 V, DC13) 1 A (at 120 V, DC13) 1 A (at 220 V, DC13) 1.5 A (at 24 V, AC15) 1.5 A (at 120 V, AC15) 1.5 A (at 240 V, AC15) |
| 3-phase motor load | 1500 W (at 400 V, AC3) |
| Motor load according to UL 508 | 1/3 HP, 120 V AC (N/O contact) 1/2 HP, 240 V AC (N/O contact) |

General

| | |
|--|---------------------------------------|
| Test voltage relay winding/relay contact | 2.5 kV _{rms} (50 Hz, 1 min.) |
| Test voltage relay contact/relay contact | 2.5 kV _{rms} (50 Hz, 1 min.) |
| Test voltage N/O contact/N/O contact | 2.5 kV _{rms} (50 Hz, 1 min.) |
| Operating mode | 100% operating factor |
| Degree of protection | RT I |

Single relay - REL-PR3- 24AC/3X1 - 2903707

Technical data

General

| | |
|-------------------------|-----------------------|
| Mechanical service life | approx. 10^7 cycles |
| Mounting position | any |

Standards and Regulations


| | |
|----------------------------------|------------------|
| Connection in acc. with standard | CSA |
| Standards/regulations | IEC 60664 |
| | IEC 61810 |
| Rated insulation voltage | 250 V AC |
| Rated surge voltage | 4 kV |
| Insulation | Basic insulation |
| Degree of pollution | 3 |
| Overvoltage category | III |

Environmental Product Compliance


| | |
|------------|---|
| China RoHS | Environmentally Friendly Use Period = 50 |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings

Diagram

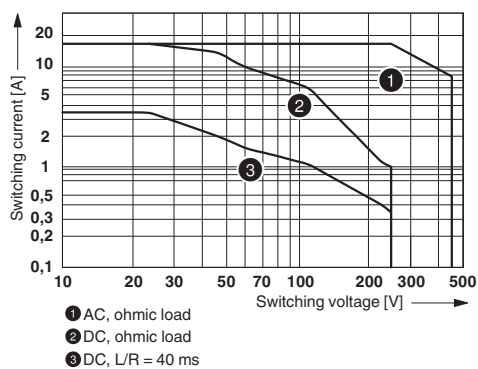


Circuit diagram



Interrupting rating


Single relay - REL-PR3- 24AC/3X1 - 2903707

Diagram

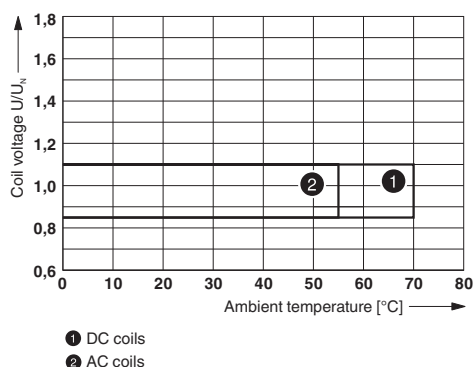


Operating voltage range

Diagram

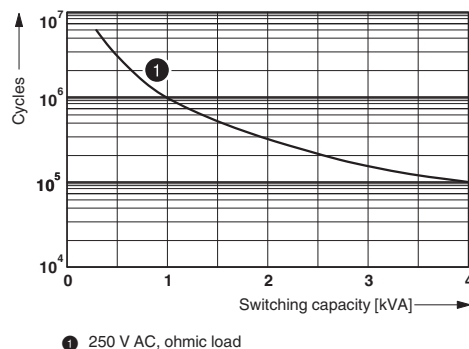

Electrical service life

Diagram

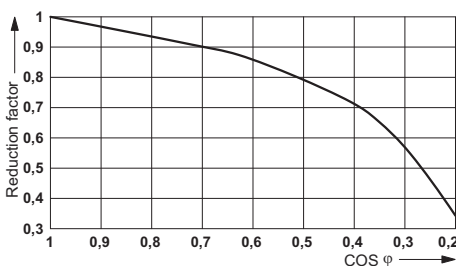

Service life reduction factor

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 5.0 | 27371601 |
| eCl@ss 5.1 | 27371600 |
| eCl@ss 6.0 | 27371600 |
| eCl@ss 7.0 | 27371601 |
| eCl@ss 8.0 | 27371601 |
| eCl@ss 9.0 | 27371601 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC001437 |
| ETIM 3.0 | EC001437 |
| ETIM 4.0 | EC001437 |
| ETIM 5.0 | EC001437 |
| ETIM 6.0 | EC001437 |

Single relay - REL-PR3- 24AC/3X1 - 2903707

Classifications

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211916 |
| UNSPSC 7.0901 | 39121515 |
| UNSPSC 11 | 39121515 |
| UNSPSC 12.01 | 39121515 |
| UNSPSC 13.2 | 39122334 |

Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals

Approval details

| | | | |
|-----|--|---|---------|
| CSA | | http://www.csagroup.org/services-industries/product-listing/ | 2554095 |
|-----|--|---|---------|

| | | | |
|---------------|--|---|---------------|
| UL Recognized | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 172140 |
|---------------|--|---|---------------|

| | | | |
|----------------|--|---|---------------|
| cUL Recognized | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 172140 |
|----------------|--|---|---------------|

| | | | |
|-----|--|--|--------------------------|
| EAC | | | RU C- DE.A*30.B.01082 |
|-----|--|--|--------------------------|

| | | | |
|------------------|--|--|--|
| cULus Recognized | | | |
|------------------|--|--|--|

Accessories

Additional products

Single relay - REL-PR3- 24AC/3X1 - 2903707

Accessories

Relay base - RIF-4-BPT/3X21 - 2900961



RIF-4... relay base, for high-power relay with 2 or 3 PDTs or 3 N/O contacts, Push-in connection, plug-in option for input/suppressor modules, for mounting on NS 35/7,5

Relay base - RIF-4-BSC/3X21 - 2900960



RIF-4... relay base, for high-power relay with 2 or 3 changeover contacts or 3 N/O contacts, screw connection, plug-in option for input/interference suppression modules, for mounting on NS 35/7,5

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>