

Fiber optic coupling - PSM-SET-FSMA-LINK/2 - 2799416

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Coupling; set consisting of 2 couplings for connecting F-SMA plugs




Your advantages

- ✓ Suitable for fiber types:
 - POF (980/1000 µm)
 - PCF (200/230 µm)
 - GOF MM (50/125µm)
 - GOF SM (9/125µm)

RoHS

Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 118396
GTIN	4017918118396
Weight per Piece (excluding packing)	6.500 g
Custom tariff number	85367000
Country of origin	Germany

Technical data

Mechanical characteristics

Connection profile	FSMA
Connection method	Coupling
Color	Bare metallic
Degree of protection	IP20

Ambient conditions

Ambient temperature (operation)	-25 °C ... 85 °C
Degree of protection	IP20

Material data

Flammability rating according to UL 94	V0
--	----

Fiber optic coupling - PSM-SET-FSMA-LINK/2 - 2799416

Technical data

Material data

Material	Zinc die-cast
Depth	23.5 mm

Standards and Regulations


Flammability rating according to UL 94	V0
--	----

Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Drilling diagram

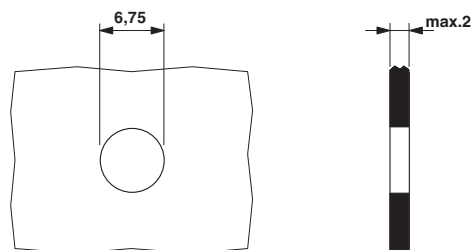

Dimensional drawing

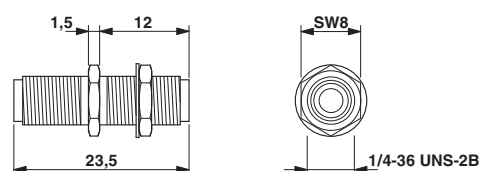

Drilling diagram F-SMA panel feed-through

Dimensional drawing F-SMA coupling

Classifications

eCl@ss

eCl@ss 4.0	27061001
eCl@ss 4.1	27061001
eCl@ss 5.0	27061803
eCl@ss 5.1	19030300
eCl@ss 6.0	27061800
eCl@ss 7.0	19170116
eCl@ss 8.0	19170116
eCl@ss 9.0	19170116

ETIM

ETIM 2.0	EC000752
ETIM 3.0	EC000752
ETIM 4.0	EC000752
ETIM 5.0	EC000752
ETIM 6.0	EC000752

Fiber optic coupling - PSM-SET-FSMA-LINK/2 - 2799416

Classifications

UNSPSC

UNSPSC 6.01	26121607
UNSPSC 7.0901	26121607
UNSPSC 11	26121607
UNSPSC 12.01	26121607
UNSPSC 13.2	26121607

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		B.01742
-----	---	---------

Accessories

Accessories

Adapter

Fiber optic coupling - PSM-SET-BFOC-LINK/2 - 2799429



Coupling; set consisting of 2 couplings for connecting B-FOC plugs

Fiber optic coupling - FL MM PATCH COUPLER LC-LC - 2700312



Coupling, LC/LC, can be used for multi-mode glass fibers

Fiber optic coupling - PSM-SET-FSMA-LINK/2 - 2799416

Accessories

Fiber optic coupling - FL SM PATCH COUPLER LC-LC - 2700313



Coupling, LC/LC, can be used for single mode glass fibers

Fiber optic coupling - FL COUPLER SC-DUPLEX - 2901788



Coupling, SC duplex/SC duplex, compatible with multi-mode and single mode glass fibers, PCF, and polymer fibers

Connector set

FO connectors - PSM-SET-FSMA/4-HCS - 2799487



F-SMA plug set for PCF fiber, for self assembly consisting of 4 quick mounting connectors with bend protection sleeve

FO connectors - PSM-SET-FSMA/4-KT - 2799720



F-SMA plug set for polymer fiber, for self assembly consisting of 4 quick mounting connectors with bend protection sleeve

Fiber optics connector (device side)

SC-RJ female insert - VS-SCRJ-GOF-BU/BU - 1652978



SC-RJ socket insert, duplex, for VS-A-F-IP67 panel mounting frame, can be used for fiberglass (multi-mode and single mode), PCF, and polymer fibers