

## Socket strip - FRONT-SFL 2,5/F32/ZD - 2285580


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



19" socket strip, number of positions: 32, pitch: 0 mm, color: green



### Key Commercial Data

Packing unit	10 pc
GTIN	 4 017918 055981
GTIN	4017918055981

### Technical data

#### Dimensions

Length	30.1 mm
Height	35.3 mm
Width	95 mm
Pitch	0 mm
Hole diameter	2.8 mm

#### General

Range of articles	FRONT-SFL 2,5
Insulating material group	I
Rated surge voltage (III/3)	4 kV
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	4 A
Nominal voltage $U_N$	250 V
Nominal cross section	2.5 mm <sup>2</sup>
Insulating material	PA
Flammability rating according to UL 94	V2
Stripping length	10 mm
Screw thread	M2,5

# Socket strip - FRONT-SFL 2,5/F32/ZD - 2285580

## Technical data

### General

Tightening torque, min	0.4 Nm
Tightening torque max	0.5 Nm
Number of positions	32

### Connection data

Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section flexible min.	0.2 mm <sup>2</sup>
Conductor cross section flexible max.	2.5 mm <sup>2</sup>
Conductor cross section AWG min.	24
Conductor cross section AWG max.	12

### Standards and Regulations


Connection in acc. with standard	EN-VDE
	CUL
Flammability rating according to UL 94	V2

### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings

Dimensional drawing

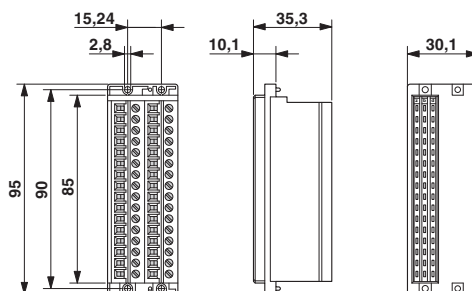

## Approvals

Approvals

# Socket strip - FRONT-SFL 2,5/F32/ZD - 2285580

## Approvals

---

Approvals


EAC / cULus Recognized


---

Ex Approvals

---

## Approval details

EAC		B.01742
-----	---	---------

cULus Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	E60425-19860303
	D	B	
Nominal voltage UN	300 V	250 V	
Nominal current IN	4 A	4 A	
mm <sup>2</sup> /AWG/kcmil	30-12	30-12	

---

Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>