

Zack Marker strip, flat - ZBF 3,5:UNBEDRUCKT - 0829392

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into flat marker groove, for terminal block width: 3.5 mm, lettering field size: 3.5 x 5.2 mm

Your advantages

- ✓ The ZBF zack marker strip system with flat marker groove is a marking solution for modular terminal blocks and electronics modules
- ✓ Other pitches available on request
- ✓ The multi-section marking strips are easy to fit and can be easily separated if required
- ✓ Labeling service: Phoenix Contact can custom-label all zack marker strip markers according to your requirements
- ✓ Unlabeled marking strips can be custom-labeled with a plotter or by hand

RoHS

Key Commercial Data

Packing unit	10 pc
Minimum order quantity	10 pc
GTIN	 4 046356 547482
GTIN	4046356547482

Technical data

Dimensions

Width (a)	3.5 mm
-----------	--------

Ambient conditions

Ambient temperature (operation)	-40 °C ... 100 °C
---------------------------------	-------------------

General

Color	white
Type	flat
Components	free from silicone and halogen
Flammability rating according to UL 94	V2
Material	PA
	PA

Zack Marker strip, flat - ZBF 3,5:UNBEDRUCKT - 0829392

Technical data

General


Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
	DIN EN 61010-1 (VDE 0411-1)
Number of individual labels	10
Number of individual labels per row	10
Number of marker strips	10
Marking mounting type	snap into flat marker groove

Standards and Regulations

Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
	DIN EN 61010-1 (VDE 0411-1)
Flammability rating according to UL 94	V2

Drawings

Schematic diagram

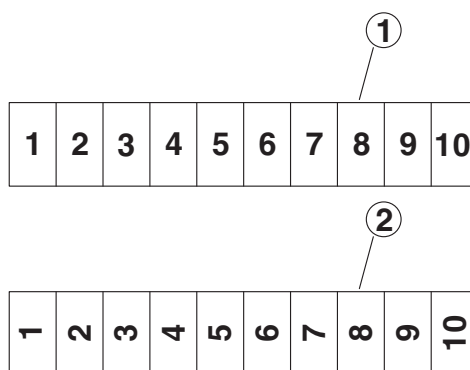

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>