

Bus system connector - SACC-M12FSD-4Q SH PN - 1554526

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Bus system connector, PROFINET CAT5 (100 Mbps), 4-position, shielded, Socket straight M12, D-coded, Insulation displacement connection, knurl material: Nickel-plated brass, external cable diameter 4 mm ... 8 mm

Your advantages

- ✓ Safe use in the field, thanks to a high degree of protection
- ✓ Flexible: connectors for on-site assembly
- ✓ Insulation displacement connection: innovative and time-saving assembly without stripping the single wire
- ✓ Reliable signal transmission - 360° shielding in environments with electromagnetic interference



Key Commercial Data

| | |
|--------------|---|
| Packing unit | 1 pc |
| GTIN |  4 046356 166218 |
| GTIN | 4046356166218 |

Technical data

Dimensions

| | |
|--------------------------------|---------------|
| External cable diameter | 4 mm ... 8 mm |
| Stripping length of the sheath | 35 mm |

Ambient conditions

| | |
|---------------------------------|------------------|
| Ambient temperature (operation) | -40 °C ... 85 °C |
| Degree of protection | IP67 |

General

| | |
|-----------------------|--|
| Note | This product corresponds to the PROFINET Cabling and Interconnection Technology Guideline for PROFINET regulations, version 2.00, order no: 2.252, Chapter 8.2 Connectors for Outside Environment (Balanced cabling) |
| Rated current at 40°C | 1.75 A |
| Rated voltage | 60 V DC |

Bus system connector - SACC-M12FSD-4Q SH PN - 1554526

Technical data

General

| | |
|---|---|
| | 48 V AC |
| Number of positions | 4 |
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Coding | D - data |
| Standards/regulations | M12 connector according to IEC 61076-2-101 |
| Signal type/category | PROFINET CAT5 (on the basis of IEC 11801), 100 Mbps |
| Status display | No |
| Overvoltage category | II |
| Degree of pollution | 3 |
| Connection method | Insulation displacement connection |
| Conductor cross section AWG | 23 ... 22 |
| Wire diameter including insulation | $\leq 1.6 \text{ mm}$ |
| Frequency of connections between conductors of the same cross section | ≥ 10 |
| Insertion/withdrawal cycles | ≥ 100 |
| Torque | 0.4 Nm (M12 knurl) |
| | 0.8 Nm (Connector with coupling sleeve) |
| | 3 Nm (Pressure nut with coupling sleeve) |

Material

| | |
|--|------------------------------|
| Flammability rating according to UL 94 | V0 |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | PA6 |
| Material of grip body | Zinc die-cast, nickel-plated |
| Material, knurls | Nickel-plated brass |
| Sealing material | Neoprene |

Standards and Regulations

| | |
|--|------------------------------|
| Standard designation | M12 connector |
| Standards/regulations | according to IEC 61076-2-101 |
| Flammability rating according to UL 94 | V0 |


Environmental Product Compliance

| | |
|------------|---|
| | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 50 |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings


Bus system connector - SACC-M12FSD-4Q SH PN - 1554526

Schematic diagram



Pin assignment M12 socket, 4-pos., D-coded,
female side

Dimensional drawing

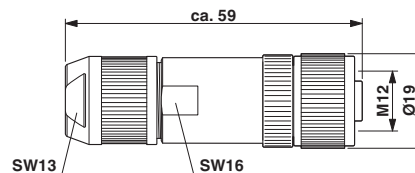

M12 x 1 socket, straight

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC



RU C-
DE.AI30.B.01102

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>