

System cable - FLK 14/EZ-DR/ 500/KONFEK - 2290834

<https://www.phoenixcontact.com/in/products/2290834>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Round cable set; connection 1: IDC/FLK socket strip (1x 14-position); connection 2: IDC/FLK socket strip (1x 14-position); cable length: 5 m

System cable - FLK 14/EZ-DR/ 500/KONFEK - 2290834



<https://www.phoenixcontact.com/in/products/2290834>

Commercial Data

Order Key	2290834
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	CK2
Catalog Page	Page 536 (C-5-2019)
GTIN	4017918058197
Weight per Piece (including packing)	307.5 GRM
Weight per Piece (excluding packing)	283.9 GRM
Customs tariff number	85444290
Country of origin	DE

System cable - FLK 14/EZ-DR/ 500/KONFEK - 2290834



<https://www.phoenixcontact.com/in/products/2290834>

Technical Data

Product properties

Insulation characteristics

Overvoltage category	II
Pollution degree	2
Insulation	Functional insulation

Ambient conditions

Degree of protection	IP00 ≥ IP54 (Installation location)
Ambient temperature (operation)	-40 °C ... 70 °C (fixed installation) -10 °C ... 70 °C (flexible installation)
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m
Resistance to oil	can withstand occasional splashes (raw cable)

Electrical properties

Max. permissible operating voltage	25 V AC 60 V DC
Nominal operating mode	100% operating factor
Max. current carrying capacity per path	1 A (50 °C) 0.6 A (70°C)
Rated insulation voltage	63 V
Rated surge voltage	0.6 kV

Supported controller SIEMENS S7-1500

Suitable I/O card	6ES7521-1BH00-0AB0
	6ES7521-1BH50-0AA0
	6ES7521-1BL00-0AB0
	6ES7522-1BH00-0AB0
	6ES7522-1BH01-0AB0
	6ES7522-1BL00-0AB0
	6ES7522-1BL01-0AB0
	6ES7531-7KF00-0AB0
	6ES7531-7NF00-0AB0
	6ES7531-7NF10-0AB0
	6ES7531-7PF00-0AB0
	6ES7532-5HF00-0AB0
	6ES7532-5HD00-0AB0
	6ES7532-5ND00-0AB0

Supported controller SIEMENS S7-300 / ET 200 M

System cable - FLK 14/EZ-DR/ 500/KONFEK - 2290834



<https://www.phoenixcontact.com/in/products/2290834>

Suitable I/O card	CPU 312C
	CPU 313C
	CPU 313C-2DP
	CPU 313C-2PiP
	CPU 314C-2DP
	CPU 314C-2PiP
	6ES7321-1BH02-0AA0
	6ES7321-1BH10-0AA0
	6ES7321-1BH50-0AA0
	6ES7321-1BL00-0AA0
	6ES7321-7BH01-0AB0
	6ES7322-1BH01-0AA0
	6ES7322-1BH10-0AA0
	6ES7322-1BL00-0AA0
	6ES7322-8BF00-0AB0
	6ES7322-8BH01-0AB0
	6ES7323-1BH01-0AA0
	6ES7323-1BL00-0AA0
	6ES7331-7HF01-0AB0
	6ES7331-7KB02-0AB0
	6ES7331-7KF02-0AB0
	6ES7331-7NF00-0AB0
	6ES7331-7PF01-0AB0
	6ES7331-7PF11-0AB0
	6ES7332-5HD01-0AB0
	6ES7332-5HB01-0AB0
	6ES7332-7ND02-0AB0
	6ES7332-8TF01-0AB0
	6ES7334-0CE01-0AA0
	6ES7334-0KE00-0AB0
	6ES7335-7HG01-0AB0
	6ES7336-4GE00-0AB0
	6ES7338-4BC01-0AB0
	6ES7350-1AH03-0AE0
	6ES7350-2AH01-0AE0
	6ES7351-1AH01-0AE0
	6ES7352-1AH02-0AE0
	6ES7353-1AH01-0AE0
	6ES7354-1AH01-0AE0
	6ES7355-0VH10-0AE0
6ES7355-1VH10-0AE0	
6ES7357-4AH01-0AE0	

Supported controller ALLEN-BRADLEY ControlLogix

System cable - FLK 14/EZ-DR/ 500/KONFEK - 2290834

<https://www.phoenixcontact.com/in/products/2290834>

Suitable I/O card	1756-IN16
	1756-IA8D
	1756-IA16
	1756-IB16
	1756-IC16
	1756-OB16E
	1756-IR6I
	1756-IT6I
	1756-OF4
	1756-OF6CI
	1756-OF8
	1756-PLS

Supported controller HONEYWELL Experion PKS C200

Suitable I/O card	TC-IDX 081
	TC-IDA 161
	TC-IAH 061
	TC-IXR 061
	TC-IXL 061
	TC-OAH 061
	TC-OAV 061
	TC-OAV 081

Supported controller SCHNEIDER ELECTRIC Modicon TSX QUANTUM

Suitable I/O card	DDI 353
	DDI 853
	DAI 453
	DDO 353

Cable / line

Cable specification	Cable for one module
---------------------	----------------------

Cable structure

Cable, preassembly	Insulation displacement, IEC 60352-4/DIN EN 60352-4
Type of cable	Round cable set
External cable diameter	6.4 mm ±0.4 mm
Outer sheath, material	Semi-rigid PVC
External sheath, color	gray
Single wire, number of litz wires	7
Single wire, material	Cu tin-plated
Wire diameter incl. insulation	1 mm ±0.03 mm
Single wire, cross section	0.14 mm ²
Single wire, cross section [AWG]	26
Shielding	no

Electrical properties

System cable - FLK 14/EZ-DR/ 500/KONFEK - 2290834

<https://www.phoenixcontact.com/in/products/2290834>

Conductor resistance	≤ 145 Ω/km (20 °C)
Cable insulation resistance	≥ 20 MΩ/km (20 °C)

Mechanical properties

Smallest bending radius, fixed installation	55 mm
Smallest bending radius, movable installation	104 mm
Bending cycles	5000 (at a radius of ≥ 15x outside diameter)

Ambient conditions

Halogen-free	No
Resistance to oil	can withstand occasional splashes (raw cable)
Flame resistance	IEC 60332-1-2 (raw cable)
	VDE 0842, Part 332-1-2 (raw cable)
	IEC 60332-3-22 (raw cable)
	UL VW-1
	CSA FT-1

color code

IDC/FLK14 (1)	IDC/FLK14 (1) = black
IDC/FLK14 (2)	IDC/FLK14 (2) = brown
IDC/FLK14 (3)	IDC/FLK14 (3) = red
IDC/FLK14 (4)	IDC/FLK14 (4) = orange
IDC/FLK14 (5)	IDC/FLK14 (5) = yellow
IDC/FLK14 (6)	IDC/FLK14 (6) = green
IDC/FLK14 (7)	IDC/FLK14 (7) = blue
IDC/FLK14 (8)	IDC/FLK14 (8) = violet
IDC/FLK14 (9)	IDC/FLK14 (9) = gray
IDC/FLK14 (10)	IDC/FLK14 (10) = white
IDC/FLK14 (11)	IDC/FLK14 (11) = white-black
IDC/FLK14 (12)	IDC/FLK14 (12) = white-brown
IDC/FLK14 (13)	IDC/FLK14 (13) = white-red
IDC/FLK14 (14)	IDC/FLK14 (14) = white-orange

Connection data

Field level

Connection in acc. with standard	IEC 60603-13
Connection method	IDC/FLK socket strip
Number of connections	1
Number of positions	14
Insertion/withdrawal cycles	> 50
Pitch	2.54 mm

Controller level

Connection in acc. with standard	IEC 60603-13
----------------------------------	--------------

System cable - FLK 14/EZ-DR/ 500/KONFEK - 2290834



<https://www.phoenixcontact.com/in/products/2290834>

Connection method	IDC/FLK socket strip
Number of connections	1
Number of positions	14
Insertion/withdrawal cycles	> 50
Pitch	2.54 mm

Standards and regulations


Gasoline resistance	can withstand occasional splashes (raw cable)
Flame resistance	IEC 60332-1-2 (raw cable)
	VDE 0842, Part 332-1-2 (raw cable)
	IEC 60332-3-22 (raw cable)
	UL VW-1
	CSA FT-1
Resistance to oil	can withstand occasional splashes (raw cable)

Air clearances and creepage distances

Standards/regulations	DIN EN 50178
-----------------------	--------------

Drawings

Diagram

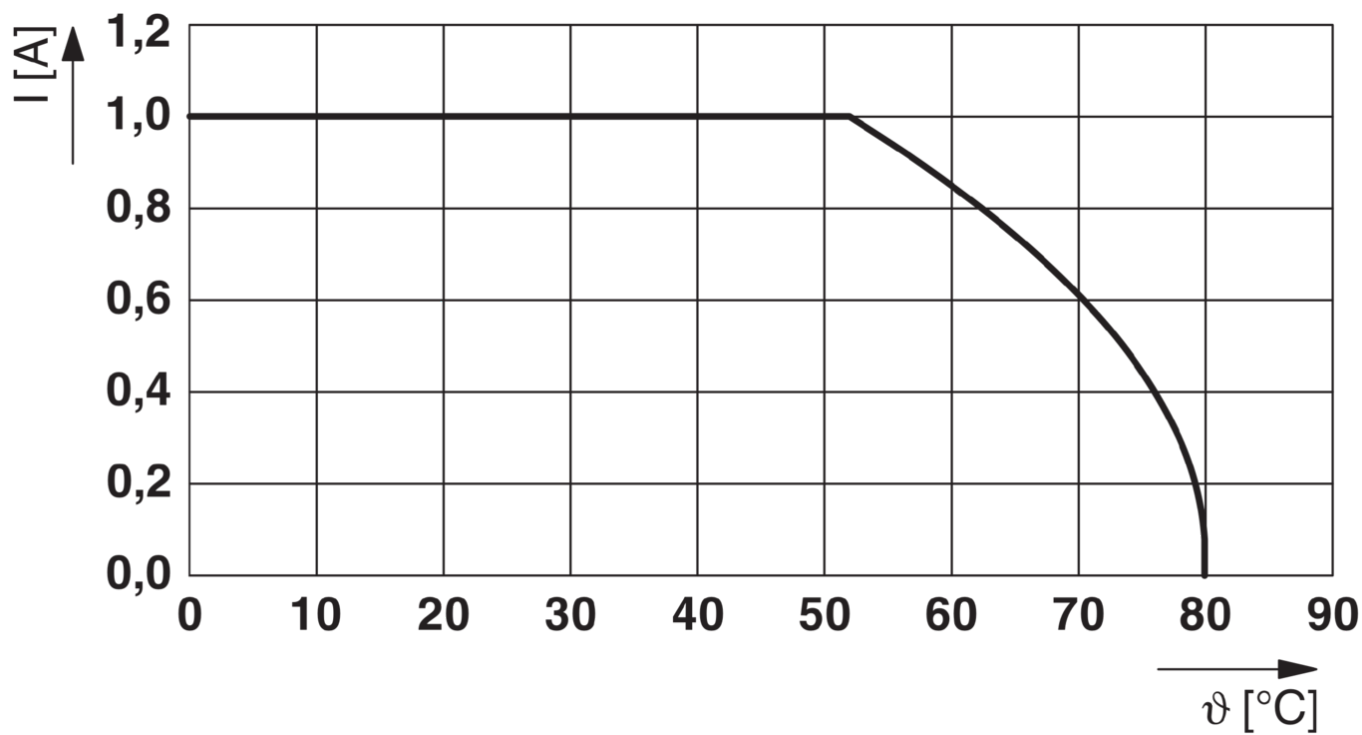


System cable - FLK 14/EZ-DR/ 500/KONFEK - 2290834



<https://www.phoenixcontact.com/in/products/2290834>


Approvals

UL Listed 

Nominal voltage U_N	125 V
Nominal current I_N	1 A

cUL Listed 

Nominal voltage U_N	125 V
Nominal current I_N	1 A

EAC 

cULus Listed

System cable - FLK 14/EZ-DR/ 500/KONFEK - 2290834

<https://www.phoenixcontact.com/in/products/2290834>



Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

System cable - FLK 14/EZ-DR/ 500/KONFEK - 2290834

<https://www.phoenixcontact.com/in/products/2290834>

Accessories

Marker carrier cable

Marker carrier cable - KME - 0807083



Cable marker carrier, white, unlabeled, mounting type: Assembly with cable binders, cable diameter: > 5 mm, lettering field size: 20 mm x 8 mm

Phoenix Contact 2021 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in