

# Interface module - VIP-3/SC/HD26SUB/F



2322414

<https://www.phoenixcontact.com/in/products/2322414>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



VARIOFACE module, with screw connection and high density D-SUB miniature socket strip, for mounting on NS 35 rails, no. of pos.: 26, width: 79 mm

## Your advantages

- Screw connection
- 1:1 connection

## Commercial Data

Item number	2322414
Packing unit	1 pc
Minimum order quantity	1 pc
Sales Key	CK2
Product Key	CK2451
Catalog Page	Page 558 (C-5-2019)
GTIN	4046356451710
Weight per Piece (including packing)	142.133 g
Weight per Piece (excluding packing)	140 g
Customs tariff number	85366990
Country of origin	US

# Interface module - VIP-3/SC/HD26SUB/F



2322414

<https://www.phoenixcontact.com/in/products/2322414>

## Technical Data

### Product properties

Product type	Interface module
Number of positions	26

### Electrical properties

Nominal voltage $U_N$	25 V AC
	60 V DC
Max. current carrying capacity per branch	1 A

### Connection data

#### Field level

Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M3
Number of positions	26
Conductor cross section solid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 12


#### Controller level

Connection method	High-density D-SUB socket strip
Number of connections	1
Number of positions	26

### LED signaling

Status display	No
Status display present	No

### Dimensions

Dimensional drawing	
Width	52.3 mm
Height	69 mm
Depth	62 mm

### Material specifications

# Interface module - VIP-3/SC/HD26SUB/F



2322414

<https://www.phoenixcontact.com/in/products/2322414>

Flammability rating according to UL 94	V0
Housing insulation material	Polyamide PA non-reinforced

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

## Standards and regulations

Standards/regulations	EN 50178
-----------------------	----------

## Mounting

Mounting type	DIN rail mounting
Mounting position	any

# Interface module - VIP-3/SC/HD26SUB/F




2322414

<https://www.phoenixcontact.com/in/products/2322414>

## Drawings

Dimensional drawing

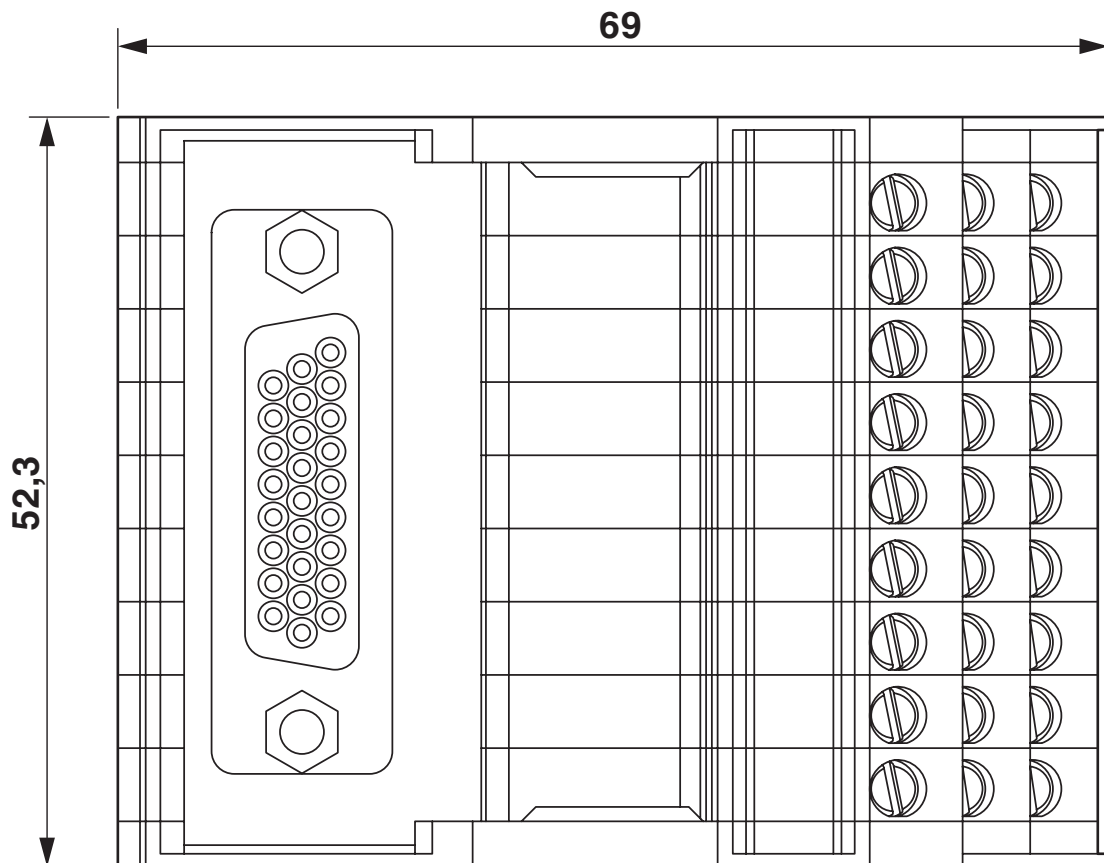


# Interface module - VIP-3/SC/HD26SUB/F



2322414

<https://www.phoenixcontact.com/in/products/2322414>

Circuit diagram

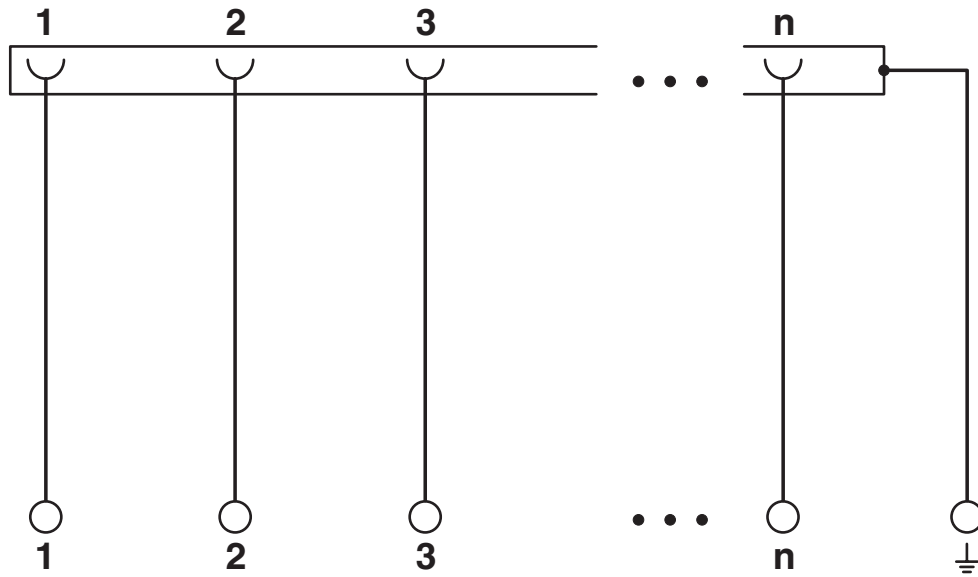

# Interface module - VIP-3/SC/HD26SUB/F




2322414

<https://www.phoenixcontact.com/in/products/2322414>

## Approvals

 <b>cUL Recognized</b> Approval ID: FILE E 238705				
	Nominal Voltage $U_N$	Nominal Current $I_N$	Cross Section AWG	Cross Section $\text{mm}^2$
	125 V	1 A	30 - 12	-

 <b>UL Recognized</b> Approval ID: FILE E 238705				
	Nominal Voltage $U_N$	Nominal Current $I_N$	Cross Section AWG	Cross Section $\text{mm}^2$
	125 V	1 A	30 - 12	-

 <b>EAC</b> Approval ID: RU C-DE.A*30.B.01742	
---	--

<b>cULus Recognized</b>	
-------------------------	--

# Interface module - VIP-3/SC/HD26SUB/F



2322414

<https://www.phoenixcontact.com/in/products/2322414>

## Classifications

### ECLASS

ECLASS-9.0	27141152
ECLASS-10.0.1	27141152
ECLASS-11.0	27141152

### ETIM

ETIM 8.0	EC002780
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# Interface module - VIP-3/SC/HD26SUB/F



2322414

<https://www.phoenixcontact.com/in/products/2322414>

## Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2022 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.

A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420

[info@phoenixcontact.co.in](mailto:info@phoenixcontact.co.in)