


STTB 1,5-PE - Protective conductor double-level terminal block

3036013

<https://www.phoenixcontact.com/in/products/3036013>

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Protective conductor double-level terminal block, number of connections: 4, connection method: Spring-cage connection, 1st and 2nd level, cross section: 0.08 mm² - 1.5 mm², mounting type: NS 35/7,5, NS 35/15, color: green-yellow

Your advantages

- Additional labeling options
- Low contact resistance
- Corrosion-free terminal points
- Tested for railway applications

Commercial Data

Item number	3036013
Packing unit	50 pc
Minimum order quantity	50 pc
Sales Key	BE2
Product Key	BE2124
Catalog Page	Page 208 (C-1-2019)
GTIN	4017918817275
Weight per Piece (including packing)	13.16 g
Weight per Piece (excluding packing)	12.225 g
Customs tariff number	85369010
Country of origin	DE

STTB 1,5-PE - Protective conductor double-level terminal block



3036013

<https://www.phoenixcontact.com/in/products/3036013>

Technical Data

Product properties

Product type	Ground terminal block
Area of application	Railway industry
	Machine building
	Plant engineering
	Process industry
Number of connections	4
Number of rows	2

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	0.56 W

Connection data

Grounding foot	Yes
Number of connections per level	2
Nominal cross section	1.5 mm ²

1st and 2nd level

Note	Please observe the current carrying capacity of the DIN rails.
Stripping length	10 mm
Internal cylindrical gage	A1
Connection in acc. with standard	IEC 60947-7-2
Conductor cross section rigid	0.08 mm ² ... 1.5 mm ²
Cross section AWG	28 ... 16 (converted acc. to IEC)
Conductor cross section flexible	0.08 mm ² ... 1.5 mm ²
Conductor cross section, flexible [AWG]	28 ... 16 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm ² ... 1.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm ² ... 1.5 mm ²

Ex data

Rated data (ATEX/IECEx)

Identification	□ II 2 GD Ex eb IIC Gb
Operating temperature range	-60 °C ... 110 °C
Ex-certified accessories	3030459 D-STTB 2,5 1204504 SZF 0-0,4X2,5

STTB 1,5-PE - Protective conductor double-level terminal block



3036013

<https://www.phoenixcontact.com/in/products/3036013>

	3022276 CLIPFIX 35-5
	3022218 CLIPFIX 35
output	(Permanent)

Ex connection data General

Nominal cross section	1.5 mm ²
Rated cross section AWG	16
Connection capacity rigid	0.08 mm ² ... 1.5 mm ²
Connection capacity AWG	28 ... 16
Connection capacity flexible	0.08 mm ² ... 1.5 mm ²
Connection capacity AWG	28 ... 16

Dimensions

Width	4.2 mm
End cover width	2.2 mm
Height NS 35/15	55 mm
Height NS 35/7,5	47.5 mm
Length	67.5 mm

Material specifications

Color	green-yellow
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	27,5 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Oscillation/broadband noise

STTB 1,5-PE - Protective conductor double-level terminal block



3036013

<https://www.phoenixcontact.com/in/products/3036013>

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Spectrum	Service life test category 2, bogie-mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$
ASD level	6.12 (m/s ²)/Hz
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

Shocks

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Pulse shape	Half-sine
Acceleration	30g
Shock duration	18 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-2
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15


STTB 1,5-PE - Protective conductor double-level terminal block

3036013

<https://www.phoenixcontact.com/in/products/3036013>

Drawings

Circuit diagram

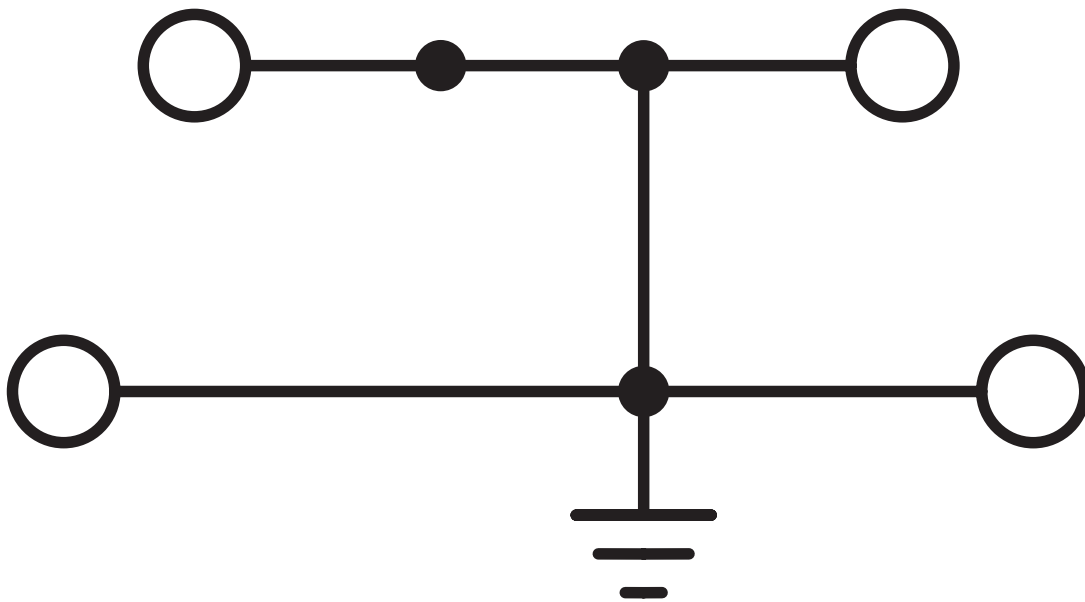

STTB 1,5-PE - Protective conductor double-level terminal block



3036013

<https://www.phoenixcontact.com/in/products/3036013>

Approvals

CSA Approval ID: 13631	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	-	-	26 - 14	-

IECEE CB Scheme Approval ID: DE1-62971_M1

LR Approval ID: LR2014888TA

KR Approval ID: HMB17372-EL002
--

NK Approval ID: 09 ME 140

RS Approval ID: 22.44.01.00083.250
--

BV Approval ID: 13403/D0 BV

VDE Zeichengenehmigung Approval ID: 40010331	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	-	-	-	0.2 - 1.5

cULus Recognized Approval ID: E60425	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2	
	Use group B	-	-	26 - 14	-
	Use group C	-	-	26 - 14	-
	-	-	-	26 - 14	-

STTB 1,5-PE - Protective conductor double-level terminal block



3036013

<https://www.phoenixcontact.com/in/products/3036013>



ATEX

Approval ID: KEMA01ATEX2129U

	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
Type examination certificate	-	-	-	0.08 - 1.5



EAC Ex

Approval ID: RU C-DE.HA91.B.00066



IECEx

Approval ID: IECEx KEM 06.0043U

	Nominal Voltage U_N	Nominal Current I_N	Cross Section AWG	Cross Section mm^2
	-	-	-	0.08 - 1.5



CCC

Approval ID: 2020322313000621



NEPSI

Approval ID: GYJ20.1193U



UKCA-EX

Approval ID: DEKRA 21UKEX0302U

STTB 1,5-PE - Protective conductor double-level terminal block



3036013

<https://www.phoenixcontact.com/in/products/3036013>

Classifications

ECLASS

ECLASS-11.0	27141141
-------------	----------

ETIM

ETIM 8.0	EC000901
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

STTB 1,5-PE - Protective conductor double-level terminal block



3036013

<https://www.phoenixcontact.com/in/products/3036013>

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

STTB 1,5-PE - Protective conductor double-level terminal block

3036013

<https://www.phoenixcontact.com/in/products/3036013>

Accessories

i Note: Applying some accessories below might limit this product.

FBS 2-4 - Plug-in bridge

3030116

<https://www.phoenixcontact.com/in/products/3030116>



Plug-in bridge, pitch: 4.2 mm, number of positions: 2, color: red

i Max. current carrying capacity: 17.5 A

FBS 3-4 - Plug-in bridge

3030129

<https://www.phoenixcontact.com/in/products/3030129>



Plug-in bridge, pitch: 4.2 mm, number of positions: 3, color: red

i Max. current carrying capacity: 17.5 A

STTB 1,5-PE - Protective conductor double-level terminal block

3036013

<https://www.phoenixcontact.com/in/products/3036013>


FBS 4-4 - Plug-in bridge

3030132

<https://www.phoenixcontact.com/in/products/3030132>



Plug-in bridge, pitch: 4.2 mm, number of positions: 4, color: red

 Max. current carrying capacity: 17.5 A


FBS 5-4 - Plug-in bridge

3030145

<https://www.phoenixcontact.com/in/products/3030145>



Plug-in bridge, pitch: 4.2 mm, number of positions: 5, color: red

 Max. current carrying capacity: 17.5 A

STTB 1,5-PE - Protective conductor double-level terminal block

3036013

<https://www.phoenixcontact.com/in/products/3036013>


FBS 10-4 - Plug-in bridge

3030158

<https://www.phoenixcontact.com/in/products/3030158>



Plug-in bridge, pitch: 4.2 mm, number of positions: 10, color: red

 Max. current carrying capacity: 17.5 A


FBS 20-4 - Plug-in bridge

3030352

<https://www.phoenixcontact.com/in/products/3030352>



Plug-in bridge, pitch: 4.2 mm, number of positions: 20, color: red

 Max. current carrying capacity: 17.5 A

STTB 1,5-PE - Protective conductor double-level terminal block

3036013

<https://www.phoenixcontact.com/in/products/3036013>


FBS 2-4 BU - Plug-in bridge

3030117

<https://www.phoenixcontact.com/in/products/3030117>



Plug-in bridge, pitch: 4.2 mm, number of positions: 2, color: blue

 Max. current carrying capacity: 17.5 A


FBS 3-4 BU - Plug-in bridge

3030130

<https://www.phoenixcontact.com/in/products/3030130>



Plug-in bridge, pitch: 4.2 mm, number of positions: 3, color: blue

 Max. current carrying capacity: 17.5 A

STTB 1,5-PE - Protective conductor double-level terminal block

3036013

<https://www.phoenixcontact.com/in/products/3036013>


FBS 4-4 BU - Plug-in bridge

3030133

<https://www.phoenixcontact.com/in/products/3030133>



Plug-in bridge, pitch: 4.2 mm, number of positions: 4, color: blue

 Max. current carrying capacity: 17.5 A


FBS 5-4 BU - Plug-in bridge

3030146

<https://www.phoenixcontact.com/in/products/3030146>



Plug-in bridge, pitch: 4.2 mm, number of positions: 5, color: blue

 Max. current carrying capacity: 17.5 A

STTB 1,5-PE - Protective conductor double-level terminal block

3036013

<https://www.phoenixcontact.com/in/products/3036013>


FBS 10-4 BU - Plug-in bridge

3036851

<https://www.phoenixcontact.com/in/products/3036851>



Plug-in bridge, pitch: 4.2 mm, number of positions: 10, color: blue

 Max. current carrying capacity: 17.5 A


FBS 20-4 BU - Plug-in bridge

3030353

<https://www.phoenixcontact.com/in/products/3030353>



Plug-in bridge, pitch: 4.2 mm, number of positions: 20, color: blue

 Max. current carrying capacity: 17.5 A

STTB 1,5-PE - Protective conductor double-level terminal block

3036013

<https://www.phoenixcontact.com/in/products/3036013>


FBS 2-4 GY - Plug-in bridge

3030118

<https://www.phoenixcontact.com/in/products/3030118>



Plug-in bridge, pitch: 4.2 mm, number of positions: 2, color: gray

 Max. current carrying capacity: 17.5 A


FBS 3-4 GY - Plug-in bridge

3030131

<https://www.phoenixcontact.com/in/products/3030131>



Plug-in bridge, pitch: 4.2 mm, number of positions: 3, color: gray

 Max. current carrying capacity: 17.5 A

STTB 1,5-PE - Protective conductor double-level terminal block

3036013

<https://www.phoenixcontact.com/in/products/3036013>


FBS 4-4 GY - Plug-in bridge

3030134

<https://www.phoenixcontact.com/in/products/3030134>



Plug-in bridge, pitch: 4.2 mm, number of positions: 4, color: gray

 Max. current carrying capacity: 17.5 A

FBS 5-4 GY - Plug-in bridge

3030147

<https://www.phoenixcontact.com/in/products/3030147>



Plug-in bridge, pitch: 4.2 mm, number of positions: 5, color: gray

 Max. current carrying capacity: 17.5 A

STTB 1,5-PE - Protective conductor double-level terminal block

3036013

<https://www.phoenixcontact.com/in/products/3036013>

D-STTB 2,5 - End cover

3030459

<https://www.phoenixcontact.com/in/products/3030459>

End cover, length: 67.6 mm, width: 2.2 mm, height: 39.7 mm, color: gray



SZF 0-0,4X2,5 - Screwdriver

1204504

<https://www.phoenixcontact.com/in/products/1204504>

Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.4 x 2.5 x 75 mm, 2-component grip, with non-slip grip



STTB 1,5-PE - Protective conductor double-level terminal block

3036013

<https://www.phoenixcontact.com/in/products/3036013>

STP 4-2 - Marker carriers

0810575

<https://www.phoenixcontact.com/in/products/0810575>



Marker carriers, snaps into ST 1,5... spring-cage terminal blocks, can be marked with UC-TM 4, UC-TMF 4, UCT-TM 4, UCT-TMF 4, ZB 4, or ZBF 4, gray, unlabeled, mounting type: plug in, lettering field size: 4 x 10.5 mm

ST-IL - Mounting material

3039900

<https://www.phoenixcontact.com/in/products/3039900>

Operating decal for the ST terminal block



STTB 1,5-PE - Protective conductor double-level terminal block

3036013

<https://www.phoenixcontact.com/in/products/3036013>

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/in/products/0801733>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/in/products/0801681>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

STTB 1,5-PE - Protective conductor double-level terminal block

3036013

<https://www.phoenixcontact.com/in/products/3036013>

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/in/products/1204119>



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/in/products/1204122>



DIN rail, unperforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

STTB 1,5-PE - Protective conductor double-level terminal block

3036013

<https://www.phoenixcontact.com/in/products/3036013>

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/in/products/0801704>



DIN rail, unperforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/in/products/1206421>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

STTB 1,5-PE - Protective conductor double-level terminal block

3036013

<https://www.phoenixcontact.com/in/products/3036013>

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/in/products/1206434>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/in/products/0801762>



DIN rail, unperforated, acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

STTB 1,5-PE - Protective conductor double-level terminal block

3036013

<https://www.phoenixcontact.com/in/products/3036013>

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/in/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



ISH 1,5/0,2 - Insulating sleeve

3206131

<https://www.phoenixcontact.com/in/products/3206131>

Insulating sleeve, color: white



STTB 1,5-PE - Protective conductor double-level terminal block

3036013

<https://www.phoenixcontact.com/in/products/3036013>

ISH 1,5/0,5 - Insulating sleeve

3031034

<https://www.phoenixcontact.com/in/products/3031034>



Insulating sleeve, color: gray

PS-4 - Test plugs

3030970

<https://www.phoenixcontact.com/in/products/3030970>



Test plugs, Modular test plug, color: red

STTB 1,5-PE - Protective conductor double-level terminal block

3036013

<https://www.phoenixcontact.com/in/products/3036013>

DP PS-4 - Spacer plate

3036712

<https://www.phoenixcontact.com/in/products/3036712>



Spacer plate, length: 22.4 mm, width: 4.2 mm, height: 29 mm, number of positions: 1, color: red

PAI-4 - Test adapter

3030925

<https://www.phoenixcontact.com/in/products/3030925>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 4.2 mm pitch, color: gray

STTB 1,5-PE - Protective conductor double-level terminal block




3036013

<https://www.phoenixcontact.com/in/products/3036013>

E/AL-NS 35 - End clamp

1201662

<https://www.phoenixcontact.com/in/products/1201662>



End clamp, for end support of UKH 50 to UKH 240, is pushed onto DIN rail NS 35 and fixed with 2 screws, width: 10 mm, color: aluminum

Phoenix Contact 2023 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in