

IPC 5/ 8-STGCL-7,62

Order No.: 1718326

The figure shows a 5-pos. version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1718326>

Plug component, Nominal current: 41 A, Nom. voltage: 1000 V, Pitch:
7.62 mm, Number of positions: 8, Connection type: Screw connection,
Color: green

| Commercial data | |
|--------------------------|--------------------|
| EAN | 4046356175333 |
| Pack | 50 pcs. |
| Customs tariff | 85366990 |
| Weight/Piece | 0.035354 KG |
| Catalog page information | Page 337 (CC-2007) |

Product notes

WEEE/RoHS-compliant since:
11/23/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Certificates / Approvals



Certification

CUL, UL

CUL


| | |
|-----------------------|-------|
| Nominal voltage U_N | 600 V |
| Nominal current I_N | 41 A |
| AWG/kcmil | 24-8 |

UL


| | |
|-----------------------|-------|
| Nominal voltage U_N | 600 V |
| Nominal current I_N | 41 A |
| AWG/kcmil | 24-8 |

Drawings


Diagram

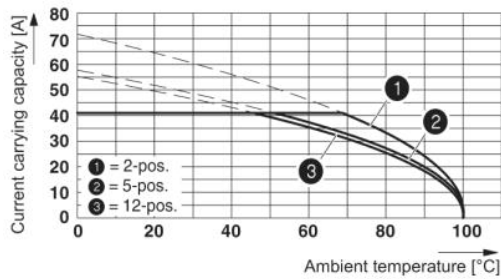

Derating curve for: IPC 5/...-ST-7.62 with PC 5/...-ST-7.62
 Conductor cross section = 10 mm²

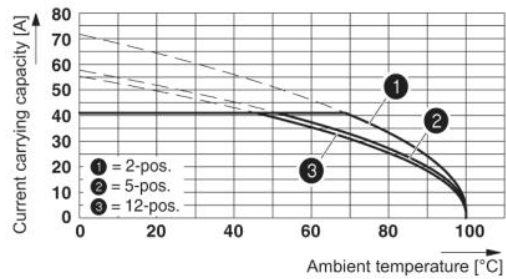


Derating curve for: IPC 5/...-ST-7.62 with IPC 5/...-G-7.62
 Conductor cross section = 10 mm²

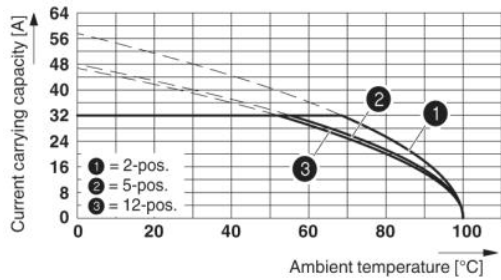

Derating curve for: IPC 5/...-ST-7,62 with IPC 5/...-G-7,62
 Conductor cross section 6 mm²

Dimensioned drawing

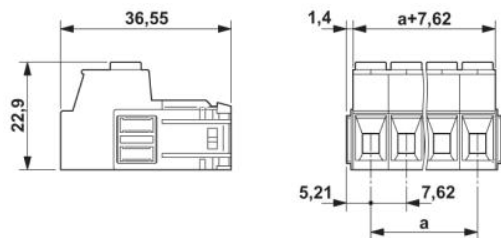

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;