

## IPC 5/ 3-STGCL-7,62

Order No.: 1718274

The figure shows a 5-pos. version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1718274>

Plug component, Nominal current: 41 A, Nom. voltage: 1000 V, Pitch:  
7.62 mm, Number of positions: 3, Connection type: Screw connection,  
Color: green

Commercial data	
EAN	4046356175272
Pack	50 pcs.
Customs tariff	85366990
Weight/Piece	0.01395 KG
Catalog page information	Page 337 (CC-2007)

**Product notes**WEEE/RoHS-compliant since:  
11/23/2006

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Certificates / Approvals**

Certification

CUL, UL

**CUL**


Nominal voltage $U_N$	600 V
Nominal current $I_N$	41 A
AWG/kcmil	24-8

**UL**


Nominal voltage $U_N$	600 V
Nominal current $I_N$	41 A
AWG/kcmil	24-8

**Drawings**


Diagram

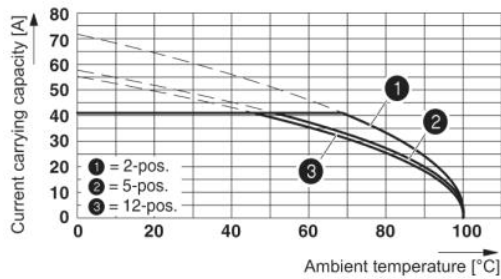

Derating curve for: IPC 5/...-ST-7.62 with PC 5/...-ST-7.62  
 Conductor cross section = 10 mm<sup>2</sup>

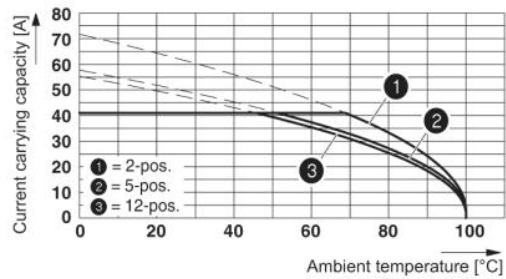


Derating curve for: IPC 5/...-ST-7.62 with IPC 5/...-G-7.62  
 Conductor cross section = 10 mm<sup>2</sup>

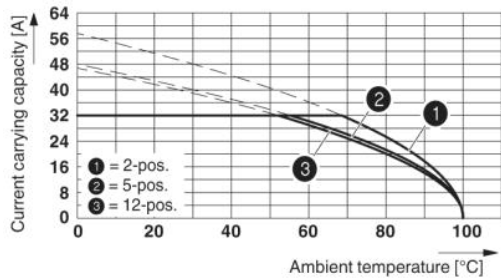

Derating curve for: IPC 5/...-ST-7,62 with IPC 5/...-G-7,62  
 Conductor cross section 6 mm<sup>2</sup>

Dimensioned drawing

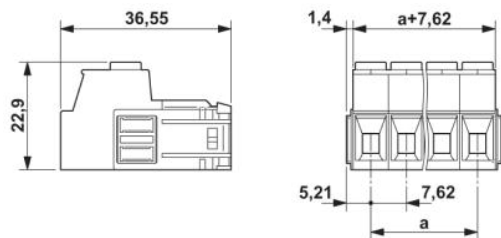

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact  
Technical modifications reserved;