

**V-RC/TGUM 13/KVD 13/LBL 16+3**

Order No.: 1000042

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1000042>

M23 socket, 19-pos., straight, freely configurable, with solder connection, for external cable diameter of 10 mm ... 14 mm

**Commercial data**

EAN	4017918399849
Pack	1 pcs.
Customs tariff	85366990
Weight/Piece	0.10 KG
Catalog page information	Page 128 (PC-2009)

**Product notes**

WEEE/RoHS-compliant since:  
03/10/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****General data**

Nominal voltage $U_N$	120 V
Max. operating voltage $U_{max}$	135 V
Number of positions	19
Degree of protection	IP65/67
Ambient temperature (operation)	-40 °C ... 125 °C

**Master cable data**

Type of connection	M23 screw locking
External cable diameter min.	10 mm
External cable diameter max.	14 mm

**Anschlussbelegung**

Steckplatz/Pol = Pin = Aderfarbe	1 / 4 (A) = 15 = WH
	1 / 2 (B) = 7 = GY/PK
	2 / 4 (A) = 5 = GN
	2 / 2 (B) = 4 = RD/BU
	3 / 4 (A) = 16 = YE
	3 / 2 (B) = 8 = WH/GN
	4 / 4 (A) = 3 = GY
	4 / 2 (B) = 14 = BN/GN
	5 / 4 (A) = 17 = PK
	5 / 2 (B) = 9 = WH/YE
	6 / 4 (A) = 2 = RD
	6 / 2 (B) = 13 = YE/BN
	7 / 4 (A) = 11 = BK
	7 / 2 (B) = 10 = WH/GY
	8 / 4 (A) = 1 = VT
	8 / 2 (B) = 18 = GY/BN
	1-8 / 1 (+ 120 V) = 19 = BN
	1-8 / 3 (0 V) = 6 = BU
	1-8 / 5 (PE) = 12 = GN/YE


**Accessories**

Item	Designation	Description
<b>General</b>		
1665062	PLUSCON-RCS	Special pipe spanner, tool for mounting the M23 connector housing (with assembly), for coupling and sleeve housing

**Drawings**

Schematic diagram

Pin assignment M23 socket, 19-pos., female side view

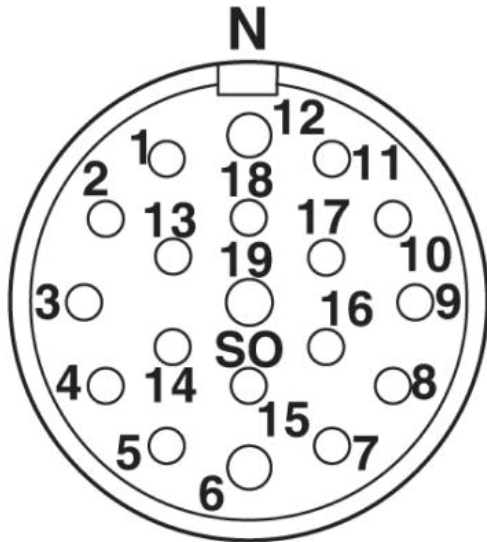

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact  
Technical modifications reserved;