

SACC-DSIV-M12MSB-5CON-L180

Order No.: 1514883

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1514883>Sensor/Actuator flush-type plug, 5-pos., M12, B-coded, rear/screw
mounting with M12 thread, with straight solder connection**Commercial data**

EAN	4017918923150
Pack	10 pcs.
Customs tariff	85444290
Weight/Piece	0.01174 KG
Catalog page information	Page 31 (PC-2009)

Product notesWEEE/RoHS-compliant since:
05/22/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.


Technical data**General data**

Nominal current I_N	4 A
Nominal voltage U_N	125 V
Number of positions	5
Volume resistance	$\leq 3 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$

Ambient temperature (operation)	-40 °C ... 85 °C
General characteristics	
Coding	B - inverse
Inflammability class acc. to UL 94	HB
Surge voltage category	II
Pollution degree	3
Degree of protection	IP67
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 66
Material, knurls	Nickel-plated brass
Sealing material	NBR
Mounting type	Rear mounting, Pg9 thread with lock nut
Type of connection	Solder pins
Status display	No


Drawings

Drilling diagram

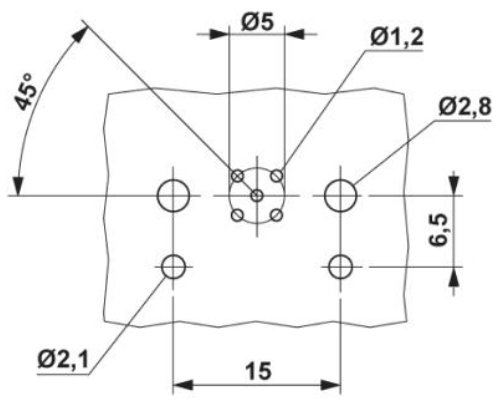

M12 flush-type plug


Dimensioned drawing

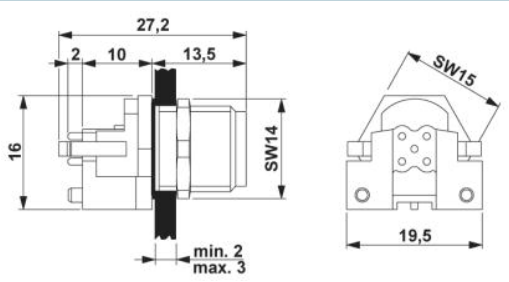

M12 flush-type plug

Schematic diagram

Pin assignment M12 male connector, 5-pos., B-coded, male side

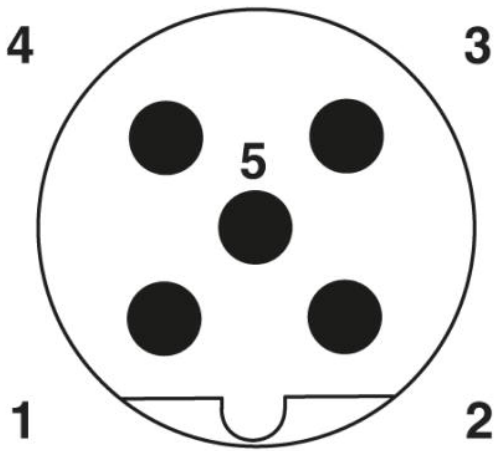

Address

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;