

## SACC-MINFS-4CON-PG13

Order No.: 1521355

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1521355>

Sensor/actuator connector, female, straight, 4-pos., 7-8", screw connection, metal knurl, cable screw connection Pg13

### Commercial data

EAN	4017918949587
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.04906 KG
Catalog page information	Page 53 (PC-2009)

### Product notes

WEEE/RoHS-compliant since:  
03/21/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

Nominal current $I_N$	9 A
Nominal voltage $U_N$	250 V
Number of positions	4
Volume resistance	$\leq 5 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$


Ambient temperature (operation)	-25 °C ... 85 °C
Pg screw connection	Pg13

**General characteristics**


Inflammability class acc. to UL 94	HB
Surge voltage category	II
Pollution degree	3
Degree of protection	IP67
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PUR / PA66
Material of grip body	PBT
Material, knurls	Anodized aluminum
Type of connection	Screw connection
Conductor cross section stranded min.	0.34 mm <sup>2</sup>
Conductor cross section stranded max.	1.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	22
Conductor cross section AWG/kcmil max	16
Min. diameter	10 mm
Max. diameter	12 mm
Status display	No

**Drawings**

Functional drawing

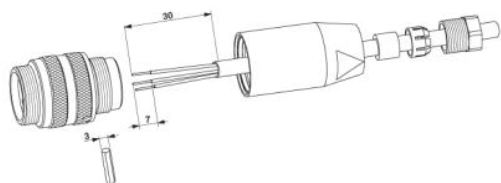


Dimensioned drawing

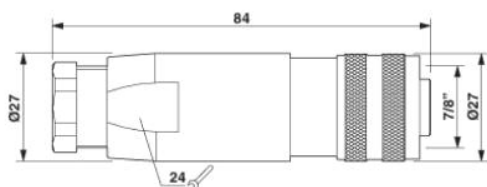

Socket 7/8"-16UNF, straight, Pg13

Schematic diagram

Pin assignment, socket, 7/8"-16UNF, 4-pos., view of female side

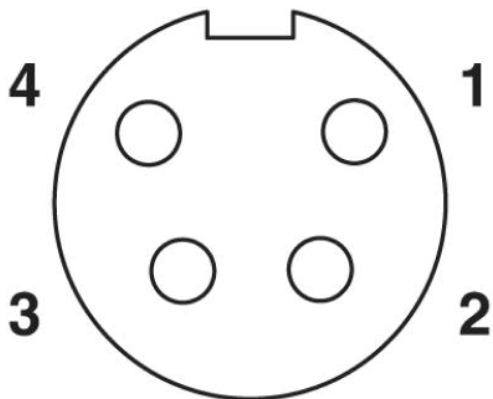

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact  
Technical modifications reserved;