

## SACC-DSIV-M12MSB-5CON-L 90

Order No.: 1527867



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1527867>

Sensor/Actuator flush-type plug, 5-pos., M12, B-coded, rear/screw mounting with M12 thread, with angled solder connection



### Commercial data

EAN	4017918984946
Pack	10 pcs.
Customs tariff	85369010
Weight/Piece	0.01174 KG
Catalog page information	Page 31 (PC-2009)

### Product notes

WEEE/RoHS-compliant since:  
03/22/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

Nominal current $I_N$	4 A
Nominal voltage $U_N$	125 V
Number of positions	5
Volume resistance	$\leq 3 \text{ m}\Omega$

Insulation resistance	≥ 100 MΩ
Ambient temperature (operation)	-40 °C ... 85 °C


### General characteristics

Coding	B - inverse
Inflammability class acc. to UL 94	HB
Surge voltage category	II
Pollution degree	3
Degree of protection	IP67
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 66
Material, knurls	Nickel-plated brass
Sealing material	NBR
Mounting type	Rear mounting, Pg9 thread with lock nut
Type of connection	Solder pins
Status display	No


### Drawings

Drilling diagram

M12 flush-type plug

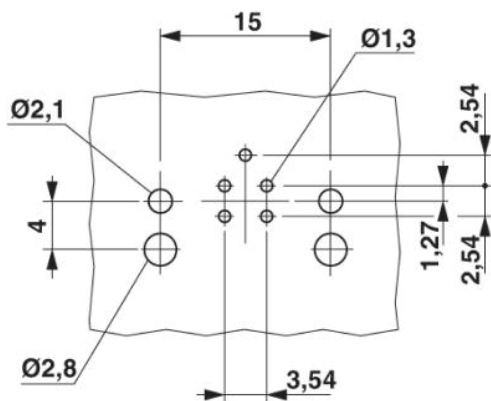


Dimensioned drawing

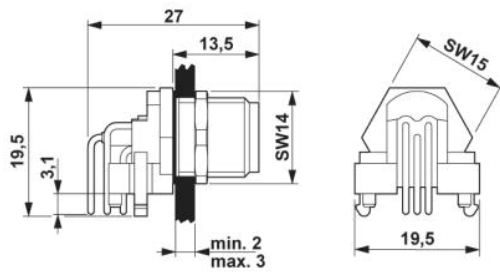

M12 flush-type plug

Schematic diagram

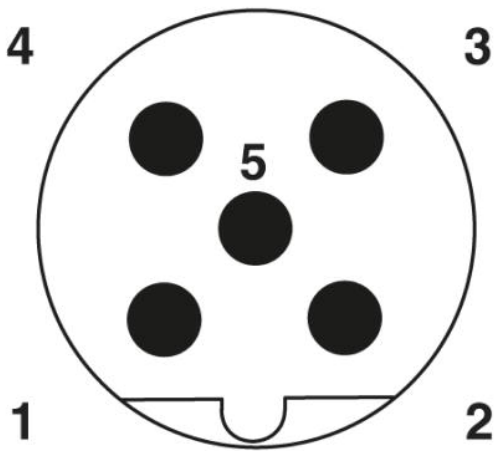

Pin assignment M12 male connector, 5-pos., B-coded, male side

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact  
Technical modifications reserved;