

## SAC-12P-10,0-PUR/M12FS MC

Order No.: 1530799



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1530799>

M12 socket, straight, 12-pos., with connected master cable, for sensor/actuator box with M5 slots, length: 10 m

### Commercial data

EAN	4046356024471
Pack	1 pcs.
Customs tariff	85444290
Weight/Piece	0.4904 KG
Catalog page information	Page 124 (PC-2009)

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General data

Nominal current $I_N$	1 A
Nominal voltage $U_N$	30 V
Number of positions	12
Volume resistance	$\leq 3 \text{ m}\Omega$
Insulation resistance	$> 10 \text{ G}\Omega$
Length of cable	10 m


#### General characteristics

Coding	A - standard
Inflammability class acc. to UL 94	HB

Surge voltage category	II
Pollution degree	3
Degree of protection	IP68
Contact material	CuSn
Contact surface material	Au
Status display	No

## Drawings

### Circuit diagram

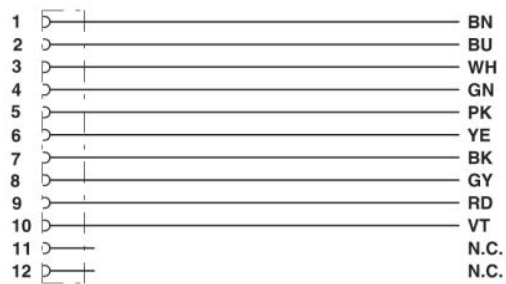

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact  
Technical modifications reserved;