

SACC-M12FSD-4Q SH

Order No.: 1553611

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1553611>

Bus system connector, socket, straight, 4-pos., M12 shielded, D-coded, QUICKON connection block, cable diameter max. 8 mm



Commercial data

EAN	4046356158787
Pack	1 pcs.
Customs tariff	85366990
Weight/Piece	0.0514 KG
Catalog page information	Page 52 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
09/21/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Nominal current I_N	1.75 A
Nominal voltage U_N	60 V
Number of positions	4
Volume resistance	$\leq 5 \text{ m}\Omega$


Insulation resistance	$\geq 100 \text{ M}\Omega$
Ambient temperature (operation)	-40 °C ... 85 °C

General characteristics

Coding	D - data
Inflammability class acc. to UL 94	V0
Surge voltage category	II
Pollution degree	3
Degree of protection	IP67
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	PA 66
Material of grip body	Zinc die-cast, nickel-plated
Material, knurls	Zinc die-cast, (nickel-plated)
Sealing material	Neoprene
Type of connection	QUICKON fast connection
Conductor cross section stranded min.	0.14 mm ²
Conductor cross section stranded max.	0.34 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	22
Min. diameter	4 mm
Max. diameter	8 mm
Status display	No


Drawings

Dimensioned drawing

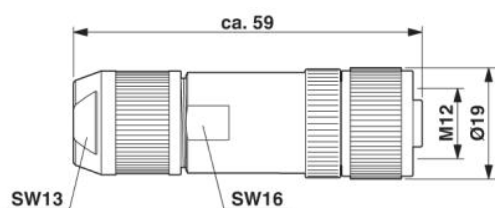

M12 x 1 female connector, straight

Schematic diagram

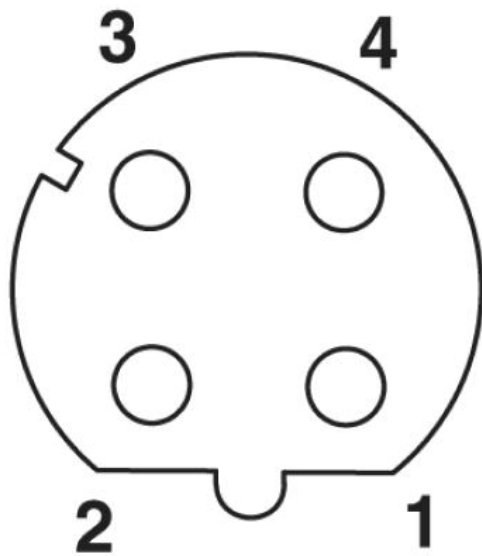

Pin assignment M12 female connector, 4-pos., D-coded, female side

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;