

**SACC-DSI-M12MS-5CON-PG9/0,5 VA**

Order No.: 1554681

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1554681>

Sensor/actuator flush-type connector, 5-pos., M12, A-coded, rear/  
screw mounting with PG9 thread, with 0.5 m TPE litz wire, 5 x 0.25  
mm<sup>2</sup>, high-grade steel version

**Commercial data**

EAN	4046356170383
Pack	1 pcs.
Customs tariff	85366990
Weight/Piece	0.0242 KG
Catalog page information	Page 144 (PC-2009)

**Product notes**

WEEE/RoHS-compliant since:  
11/10/2006



[http://  
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)  
Please note that the data given  
here has been taken from the  
online catalog. For comprehensive  
information and data, please refer  
to the user documentation. The  
General Terms and Conditions of  
Use apply to Internet downloads.

**Technical data****General data**

Nominal current I <sub>N</sub>	4 A
Nominal voltage U <sub>N</sub>	60 V
Number of positions	5
Volume resistance	≤ 3 mΩ

Insulation resistance	≥ 100 MΩ
Length of cable	0.5 m
Ambient temperature (operation)	-25 °C ... 85 °C (plug/socket)
	-25 °C ... 90 °C (cable, fixed installation)

#### General characteristics


Coding	A - standard
Inflammability class acc. to UL 94	V0
Surge voltage category	II
Pollution degree	3
Degree of protection	IP67/IP69K
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA 66
Material, knurls	High-grade steel
Sealing material	NBR
Mounting type	Rear mounting, Pg9 thread with lock nut
Type of connection	Individual wires
Status display	No

#### Conductor data

Cable type	TPE litz wire
Conductor cross section	0.25 mm <sup>2</sup>
AWG signal line	24
Conductor structure, signal line	14x 0.15 mm
Core diameter including insulation	1.15 mm ±0.07 mm
Thickness, insulation	0.21 mm
Wire colors	Black, brown, blue, white, gray
Insulation resistance	≥ 20 MΩ*km
Conductor resistance	≤ 80 Ω/km
Nominal voltage, conductor	300 V
Test voltage, conductor	2000 V AC
Material conductor insulation	TPE
Conductor material	Tin-plated Cu litz wires


## Drawings

Dimensioned drawing

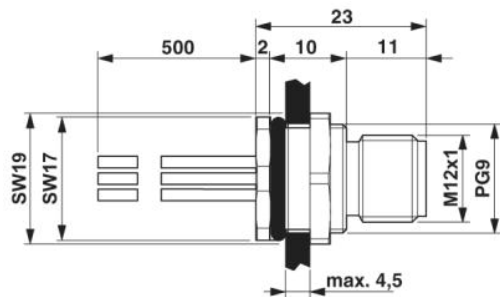

M12 flush-type plug

Schematic diagram

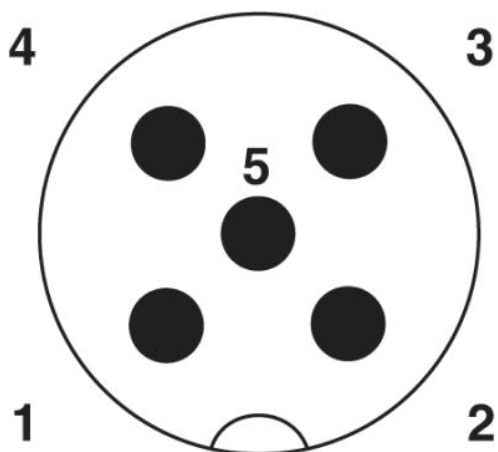

Pin assignment M12 male connector, 5-pos., A-coded, male side

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact  
Technical modifications reserved;