

# SAC-4P-M12MS CCL TR

Order No.: 1558470



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1558470>

CC-Link termination resistor, 4-pos., M12 plug

CC-Link

Commercial data	
EAN	4046356293648
Pack	1 pcs.
Customs tariff	85444290
Weight/Piece	0.01157 KG
Catalog page information	Page 291 (PC-2009)

Product notes

WEEE/RoHS-compliant since:  
07/05/2007



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.


## Technical data

General data	
Nominal current $I_N$	20 mA
Nominal voltage $U_N$	24 V
Number of positions	4
Volume resistance	$\leq 5 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$

Ambient temperature (operation)	-25 °C ... 90 °C
<b>General characteristics</b>	
Coding	A - standard
Inflammability class acc. to UL 94	HB
Surge voltage category	II
Pollution degree	3
Degree of protection	IP65/IP67/IP69K
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, (nickel-plated)
Sealing material	NBR
Status display	No


### Drawings

Dimensioned drawing

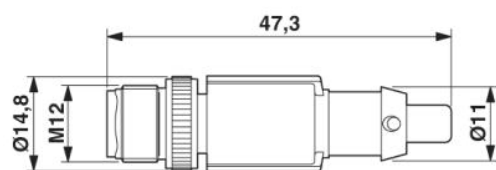


M12 termination resistor

Circuit diagram

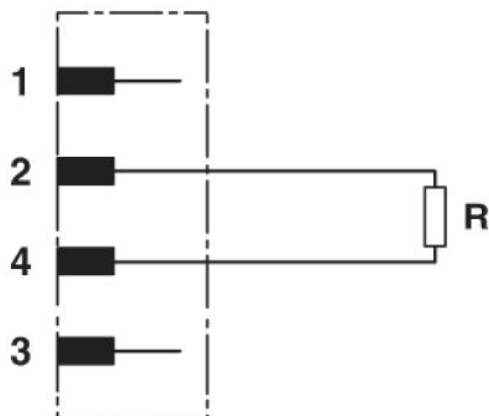

Schematic diagram

Pin assignment M12 plug, 4-pos., A-coded, view plug side

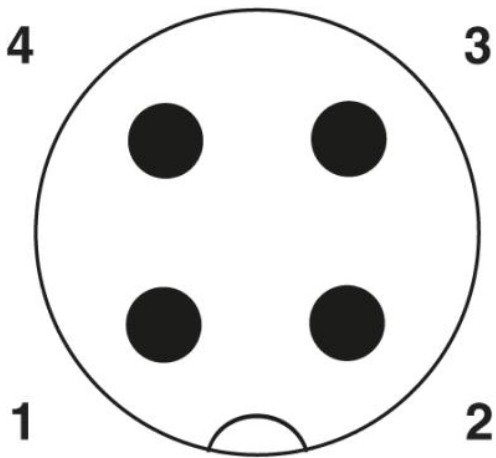

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact  
Technical modifications reserved;