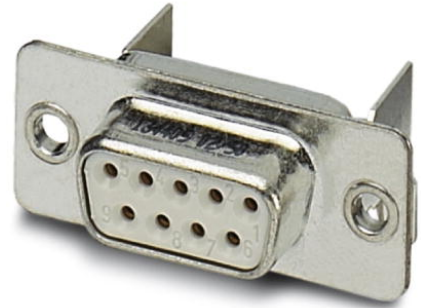


VS-09-BU-DSUB-LH-B

Order No.: 1654798

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1654798>

D-SUB contact insert, shell size 1, with nine signal contacts, contact type socket, for PCB assembly, angled, fixing with a 2.5 mm hole and solder metal plate, for panel mounting frame VS-09-...

Commercial data	
EAN	4017918989187
Pack	10 pcs.
Customs tariff	85369010
Weight/Piece	0.0102 KG
Catalog page information	Page 319 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2008

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
Mechanical characteristics	
Number of positions	9
Insertion/withdrawal cycles	≥ 200
Type of connection	Solder connection
Insertion force per signal contact	≤ 3.40 N

Ambient temperature (operation)	-55 °C ... 125 °C
---------------------------------	-------------------

Material data

Housing material	Steel
Housing surface material	Tin-plated
Contact carrier material	PBT-GF
Contact material	Copper alloy
Contact surface material	Gold over nickel
Inflammability class acc. to UL 94	V0


Electrical characteristics

Rated voltage (III/3)	125 V
Rated surge voltage	1 kV
Rated current	5 A

Drawings


Drilling diagram

Drilling diagram

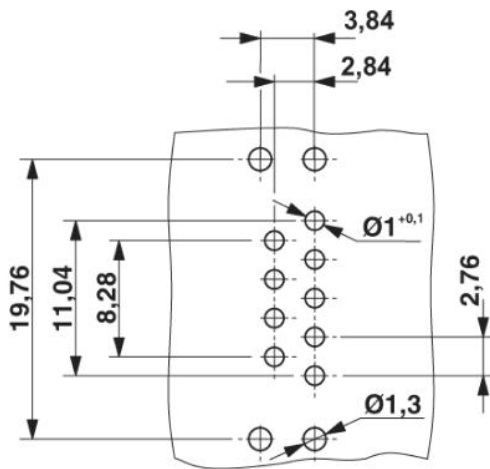

Dimensioned drawing

D-SUB contact insert

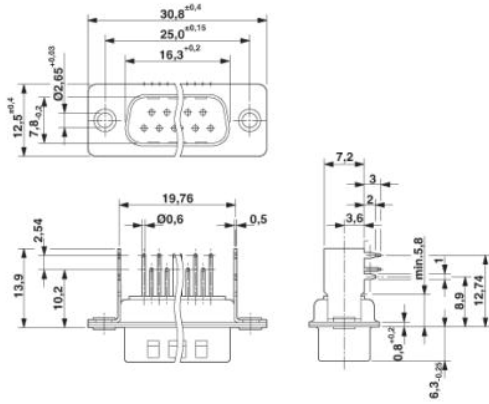

Address

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;