

## VS-25-BU-DSUB-5P-LH

Order No.: 1655438

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1655438>

D-SUB contact carrier, shell size 3, accommodation for 5 combined contacts, contact type socket, fixing with 4-40 UNC thread and solder pins, for panel mounting frame VS-25-...

### Commercial data

EAN	4046356029360
Pack	10 pcs.
Customs tariff	85369010
Weight/Piece	0.01412 KG
Catalog page information	Page 322 (PC-2009)

### Product notes

WEEE/RoHS-compliant since:  
06/22/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### Mechanical characteristics

Number of positions	5
Insertion/withdrawal cycles	≥ 500
Type of connection	Fitting to accept combined contact
Ambient temperature (operation)	-55 °C ... 125 °C

#### Material data

Housing material	Steel, yellow chromated
Contact carrier material	PBTP

Contact surface material	Gold over nickel
Inflammability class acc. to UL 94	V0


**Accessories**

Item	Designation	Description
<b>Contacts</b>		
1655454	VS-BU-LH-3,6/18/3,8	POWER contact, for D-SUB combination inserts, for PCB assembly, socket, angled, rated current 40 A, gold-plated

<b>General</b>		
1655519	VS-BU-KX-50-LP	Coaxial contact, for D-SUB combination inserts, for PCB assembly, socket, angled, gold-plated
1655632	VS-BU-KX-75-LP	Coaxial contact, for D-SUB combination inserts, for PCB assembly, socket, angled, gold-plated


**Drawings**

Drilling diagram

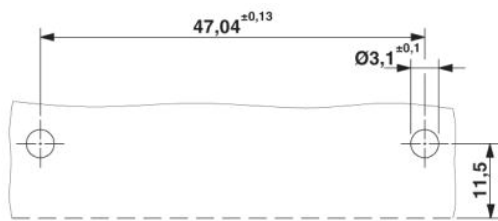

Drilling diagram

Dimensioned drawing

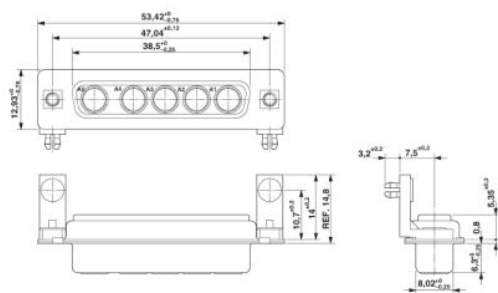

D-SUB contact carrier

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact  
Technical modifications reserved;