

VS-15-ST-DSUB-CD-OG

Order No.: 1688939

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1688939>

D-SUB contact carrier, shell size 2, for 15 signal contacts, contact type pin, for crimp contacts, straight, fixing with a 3 mm hole, for panel mounting frame and sleeve housing VS-15-...

Commercial data

EAN	4017918823085
Pack	10 pcs.
Customs tariff	85366990
Weight/Piece	0.0063 KG
Catalog page information	Page 321 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
11/28/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Mechanical characteristics

Number of positions	15
Insertion/withdrawal cycles	≥ 500
Type of connection	Crimp connection
Ambient temperature (operation)	-55 °C ... 125 °C

Material data

Housing material	Steel, yellow chromated
------------------	-------------------------

Contact carrier material	Polyester GF
Inflammability class acc. to UL 94	V0

Electrical characteristics

Rated voltage (III/3)	125 V
Rated surge voltage	1 kV
Rated current	5 A

Accessories

Item	Designation	Description
------	-------------	-------------


Contacts

1688971	VS-ST-CD-1,0/14,8/0,2	Crimp contact, for D-SUB contact inserts with standard contact density, pin, connection cross section AWG 28 ... 24, turned, gold-plated
1688968	VS-ST-CD-1,0/14,8/0,5	Crimp contact, for D-SUB contact inserts with standard contact density, pin, connection cross section AWG 24 ... 20, turned, gold-plated

Drawings

Dimensioned drawing

D-SUB contact carrier

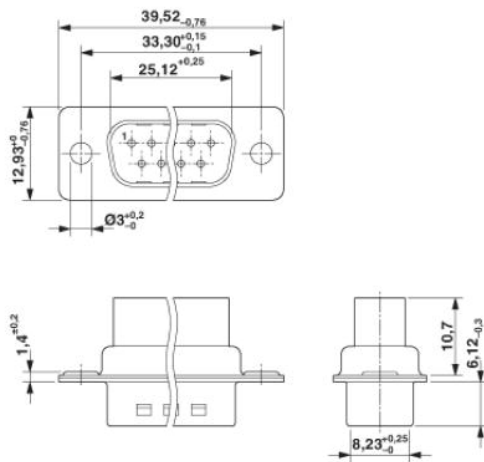

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;