

SAC-8P-10,0-PUR/M16FR

Order No.: 1693694

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1693694>

Female connector M16, angled, for box with 4 slots

Commercial data

EAN	4017918189037
Pack	1 pcs.
Customs tariff	85444290
Weight/Piece	0.7875 KG
Catalog page information	Page 126 (PC-2009)

Product notesWEEE/RoHS-compliant since:
01/01/2008

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**General data**

Nominal voltage U_N	125 V AC
	150 V DC
Number of positions	8

Number of slots	4
Degree of protection	IP67
Ambient temperature (operation)	-25 °C ... 90 °C (plug/socket)
	-40 °C ... 90 °C (cable, fixed installation)

Master cable data

Type of connection	M16 plug connection
Length of cable	10 m
Cable type	Master cable suitable for flexible cable conduit
Signal line cross section	4x 0.34 mm ²
AWG signal line	22
Conductor structure, signal line	42x 0.10 mm
Power supply cross section	2x 0.75 mm ²
AWG power supply	18
Conductor structure, voltage supply	96x 0.10 mm
External diameter	7.1 mm
Max. bending cycles	1500000
Bending radius	100 mm
Traversing path	2 m
Traversing rate	2 m/s
Ambient temperature (operation)	-40 °C ... 90 °C (for fixed installation)
	-5 °C ... 80 °C (for flexible installation)

Insulation material

Housing material	PUR
Material of contact, master cable side	CU alloy
Material of contact surface, master cable side	Gold-plated
Material of the contact carrier on the master cable side	TPU
Material of threaded sleeve	Cu alloy
Material of threaded sleeve surface	Nickel-plated
Sealing material	NBR


Anschlussbelegung

Steckplatz/Pol = Pin = Aderfarbe	1 / 4 (A) = P = WH
----------------------------------	--------------------

	2 / 4 (A) = J = GN
	3 / 4 (A) = T = YE
	4 / 4 (A) = S = GY
	1-4 / 1 (+ 120 V) = A+M = BN
	1-4 / 3 (0 V) = L+U = BU

Drawings

Circuit diagram

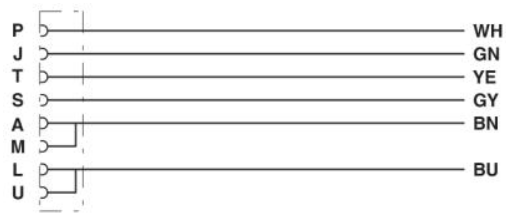

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;