

PST 1,0/10-3,5 R56

Order No.: 1720288

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1720288>

Header, Nominal current: 8 A, Nom. voltage: 160 V, Pitch: 3.5 mm,
Number of positions: 10, Color: black, Assembly: Taped SMD/THT/
THR components

Commercial data

EAN	4046356115896
Pack	250 pcs.
Customs tariff	85366990
Weight/Piece	0.02222 KG
Catalog page information	Page 479 (CC-2009)

Product notes

WEEE/RoHS-compliant since:
12/14/2005



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

Length	2.8 mm
Pitch	3.5 mm
Dimension a	31.5 mm
Number of positions	10


Pin dimensions	1 mm
Pin spacing	3.5 mm
Hole diameter	1.2 mm

Technical data


Insulating material group	IIIa
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/2)	250 V
Rated voltage (II/2)	250 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	8 A (depends on the plug used)
Nominal voltage U_N	160 V
Maximum load current	8 A (depends on the plug used)
Insulating material	PA
Inflammability class acc. to UL 94	V0

Drawings

Drilling diagram

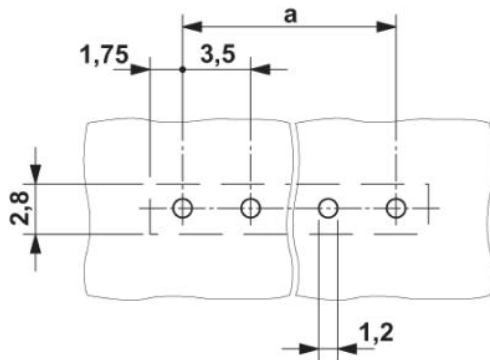

Dimensioned drawing

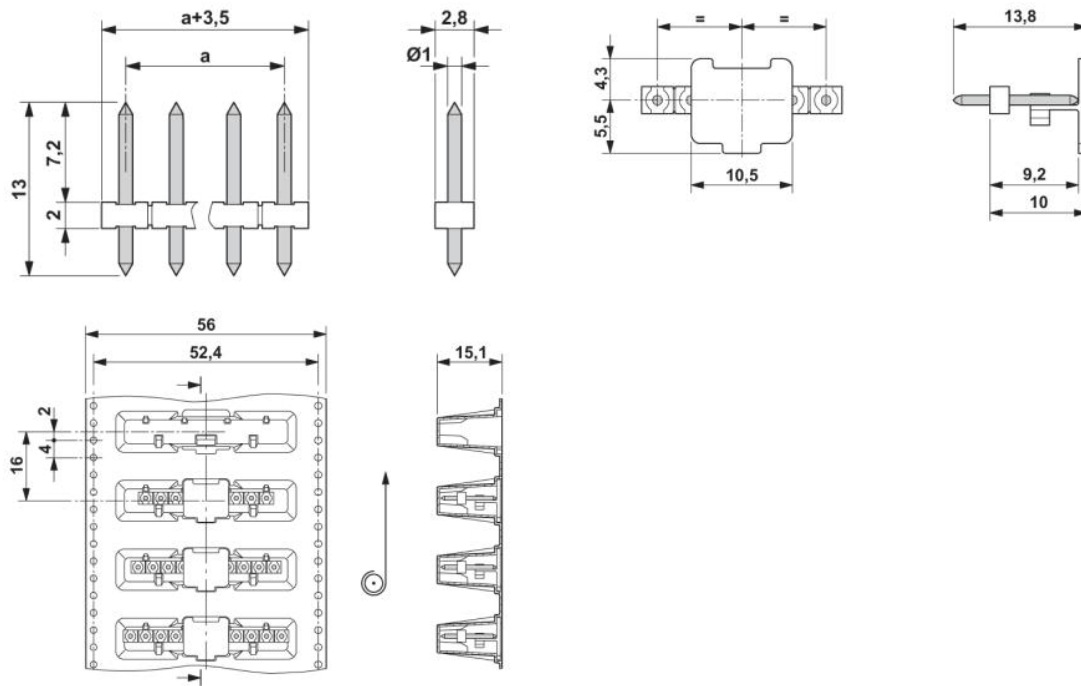

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;