

## CCDN 2,5/ 7-G1 P26 THR

Order No.: 1734326

The figure shows a 10-position version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1734326>

Header, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5 mm,  
Number of positions: 7, Color: black, Assembly: Taped SMD/THT/THR  
components

Commercial data	
EAN	4046356177191
Pack	50 pcs.
Customs tariff	85366990
Weight/Piece	0.00927 KG
Catalog page information	Page 242 (CC-2009)

**Product notes**WEEE/RoHS-compliant since:  
11/29/2006

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
<b>Dimensions / positions</b>	
Pitch	5 mm
Dimension a	30 mm
Number of positions	7
Pin dimensions	1 x 1


Pin spacing	5 mm
Hole diameter	1.6 mm

**Technical data**


Insulating material group	IIIa
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/2)	400 V
Rated voltage (II/2)	400 V
Nominal current $I_N$	12 A
Nominal voltage $U_N$	320 V
Maximum load current	12 A
Insulating material	LCP
Inflammability class acc. to UL 94	V0

**Drawings**

Drilling diagram

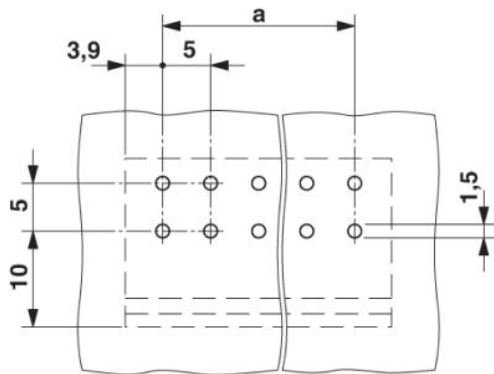

Dimensioned drawing

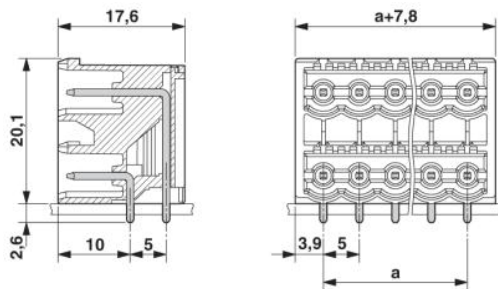

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact  
Technical modifications reserved;