

CCDN 2,5/ 9-G1 P26 THR

Order No.: 1734342

The figure shows a 10-position version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1734342>

Header, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5 mm,
Number of positions: 9, Color: black, Assembly: Taped SMD/THT/THR
components

Commercial data

| | |
|--------------------------|--------------------|
| EAN | 4046356177214 |
| Pack | 50 pcs. |
| Customs tariff | 85366990 |
| Weight/Piece | 0.011402 KG |
| Catalog page information | Page 242 (CC-2009) |

Product notes

WEEE/RoHS-compliant since:
11/29/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

| | |
|---------------------|-------|
| Pitch | 5 mm |
| Dimension a | 40 mm |
| Number of positions | 9 |
| Pin dimensions | 1 x 1 |


| | |
|---------------|--------|
| Pin spacing | 5 mm |
| Hole diameter | 1.6 mm |

Technical data


| | |
|------------------------------------|-------|
| Insulating material group | IIIa |
| Rated surge voltage (III/3) | 4 kV |
| Rated surge voltage (III/2) | 4 kV |
| Rated surge voltage (II/2) | 4 kV |
| Rated voltage (III/2) | 400 V |
| Rated voltage (II/2) | 400 V |
| Nominal current I_N | 12 A |
| Nominal voltage U_N | 320 V |
| Maximum load current | 12 A |
| Insulating material | LCP |
| Inflammability class acc. to UL 94 | V0 |

Drawings

Drilling diagram

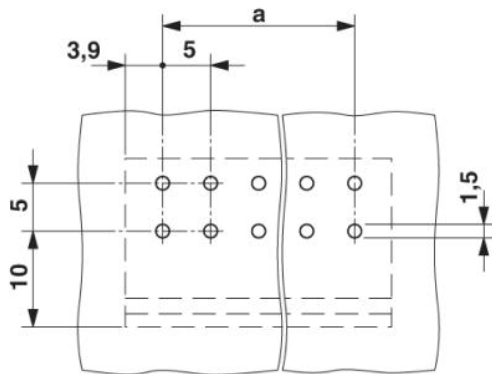

Dimensioned drawing

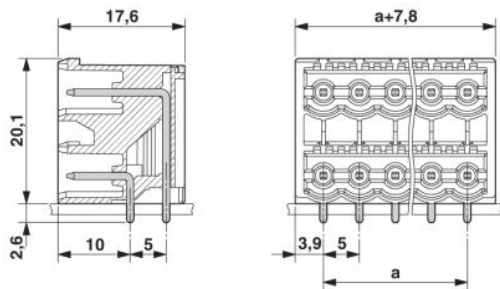

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;