

## CCDN 2,5/17-G1 P26 THR

Order No.: 1734423

The figure shows a 10-position version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1734423>

Header, Nominal current: 12 A, Nom. voltage: 320 V, Pitch: 5 mm,  
Number of positions: 17, Color: black, Assembly: Taped SMD/THT/  
THR components

### Commercial data

EAN	4046356177290
Pack	50 pcs.
Customs tariff	85366990
Weight/Piece	0.02222 KG

### Product notes

WEEE/RoHS-compliant since:  
01/13/2009



<http://>

[www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)  
Please note that the data given  
here has been taken from the  
online catalog. For comprehensive  
information and data, please refer  
to the user documentation. The  
General Terms and Conditions of  
Use apply to Internet downloads.

### Technical data

#### Dimensions / positions

Pitch	5 mm
Dimension a	80 mm
Number of positions	17
Pin dimensions	1 x 1


Pin spacing	5 mm
Hole diameter	1.6 mm

**Technical data**


Insulating material group	IIIa
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/2)	400 V
Rated voltage (II/2)	400 V
Nominal current $I_N$	12 A
Nominal voltage $U_N$	320 V
Maximum load current	12 A
Insulating material	LCP
Inflammability class acc. to UL 94	V0

**Drawings**

Drilling diagram

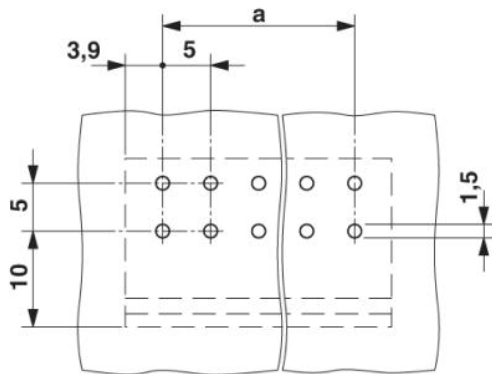

Dimensioned drawing

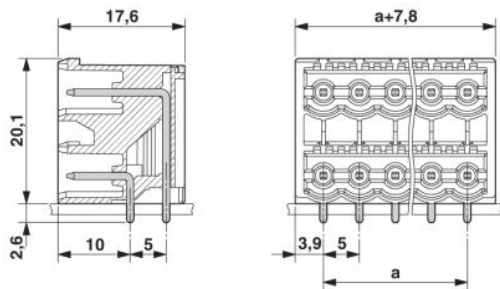

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact  
Technical modifications reserved;