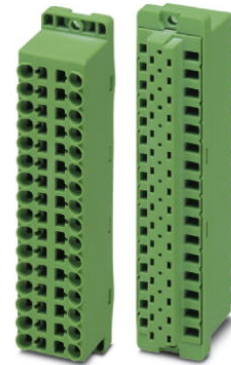


FRONT-ZFL 1,5/D32

Order No.: 2201632

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2201632>Plug component, Nominal current: 4 A, Nom. voltage: 250 V,
Color: green**Commercial data**

EAN	4017918902001
Pack	10 pcs.
Customs tariff	85366990
Weight/Piece	0.06705 KG
Catalog page information	Page 533 (CC-2009)

Product notesWEEE/RoHS-compliant since:
01/01/2003

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**Technical data**

Insulating material group	I
Rated surge voltage (II/2)	4 kV
Connection in acc. with standard	EN-VDE
Nominal current I_N	4 A
Nominal voltage U_N	250 V


Insulating material	PBT
Inflammability class acc. to UL 94	V0
Stripping length	11 mm

Connection data

Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	1.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	1.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	14

Drawings

Dimensioned drawing

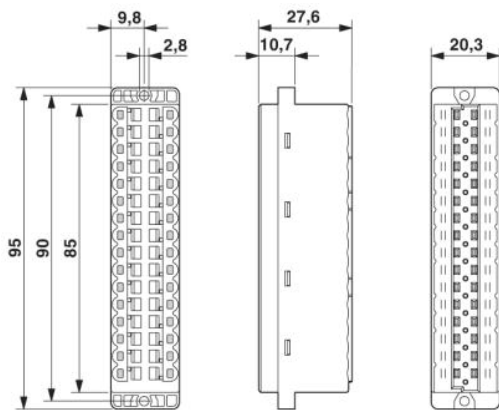

Address

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;