


SFL (2,8-0,8)F48

Order No.: 2285315

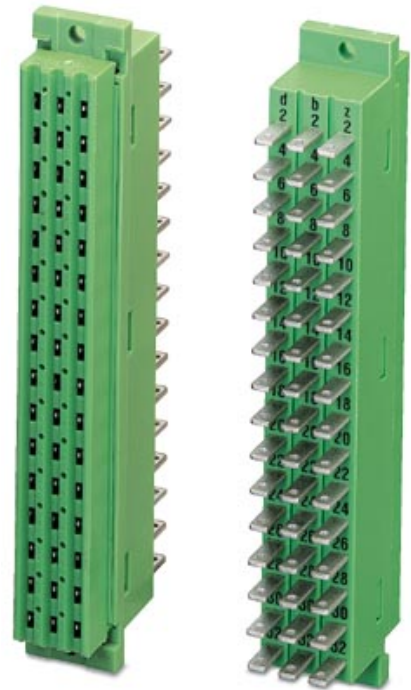

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2285315>

Flat connector socket, Nominal current: 4 A, Nom. voltage: 250 V, Number of positions: 48, Connection type: Slip-on connection, Color: green

Commercial data

EAN	4017918055912
Pack	10 pcs.
Customs tariff	85369010
Weight/Piece	0.0429 KG
Catalog page information	Page 279 (CC-2002)

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

Length	14.8 mm
Height	28.6 mm
Width	95 mm
Number of positions	48
Hole diameter	2.8 mm

Technical data

Insulating material group	II
Rated surge voltage (III/3)	2.5 kV
Insulating material	PA-F
Inflammability class acc. to UL 94	HB

Accessories


Item	Designation	Description
------	-------------	-------------

Cable/conductor

1406700	PT/FS 2,8	Plastic sheath, as touch protection, slide onto the conductor before for 2.8 slip-on sleeves
---------	-----------	--

Drawings

Dimensioned drawing

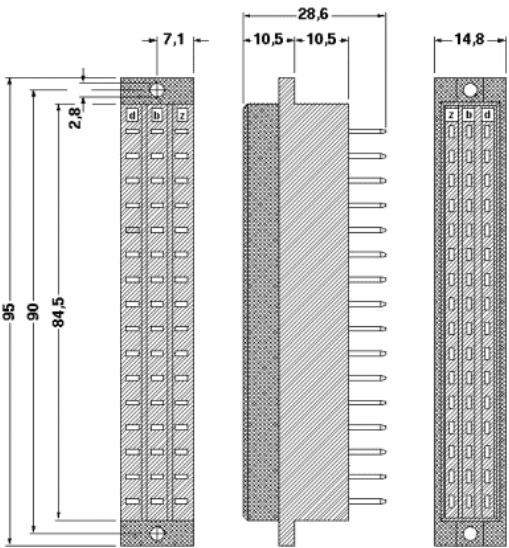

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;