

## SFLY 2,5/D32

Order No.: 2285467



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2285467>

Screw socket, Nominal current: 4 A, Nom. voltage: 250 V, Number of positions: 32, Connection type: Screw connection, Color: green

### Commercial data

EAN	4017918055943
Pack	10 pcs.
Customs tariff	85369010
Weight/Piece	0.0877 KG
Catalog page information	Page 532 (CC-2009)

### Product notes

WEEE/RoHS-compliant since:  
11/09/2007



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### Dimensions / positions

Length	39.8 mm
Height	32.4 mm
Width	95 mm
Number of positions	32
Hole diameter	2.8 mm

Screw thread	M3
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm

**Technical data**


Insulating material group	I
Rated surge voltage (III/3)	4 kV
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	4 A
Nominal voltage $U_N$	250 V
Insulating material	PA
Inflammability class acc. to UL 94	V2
Stripping length	8 mm

**Connection data**

Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

## Drawings

Dimensioned drawing

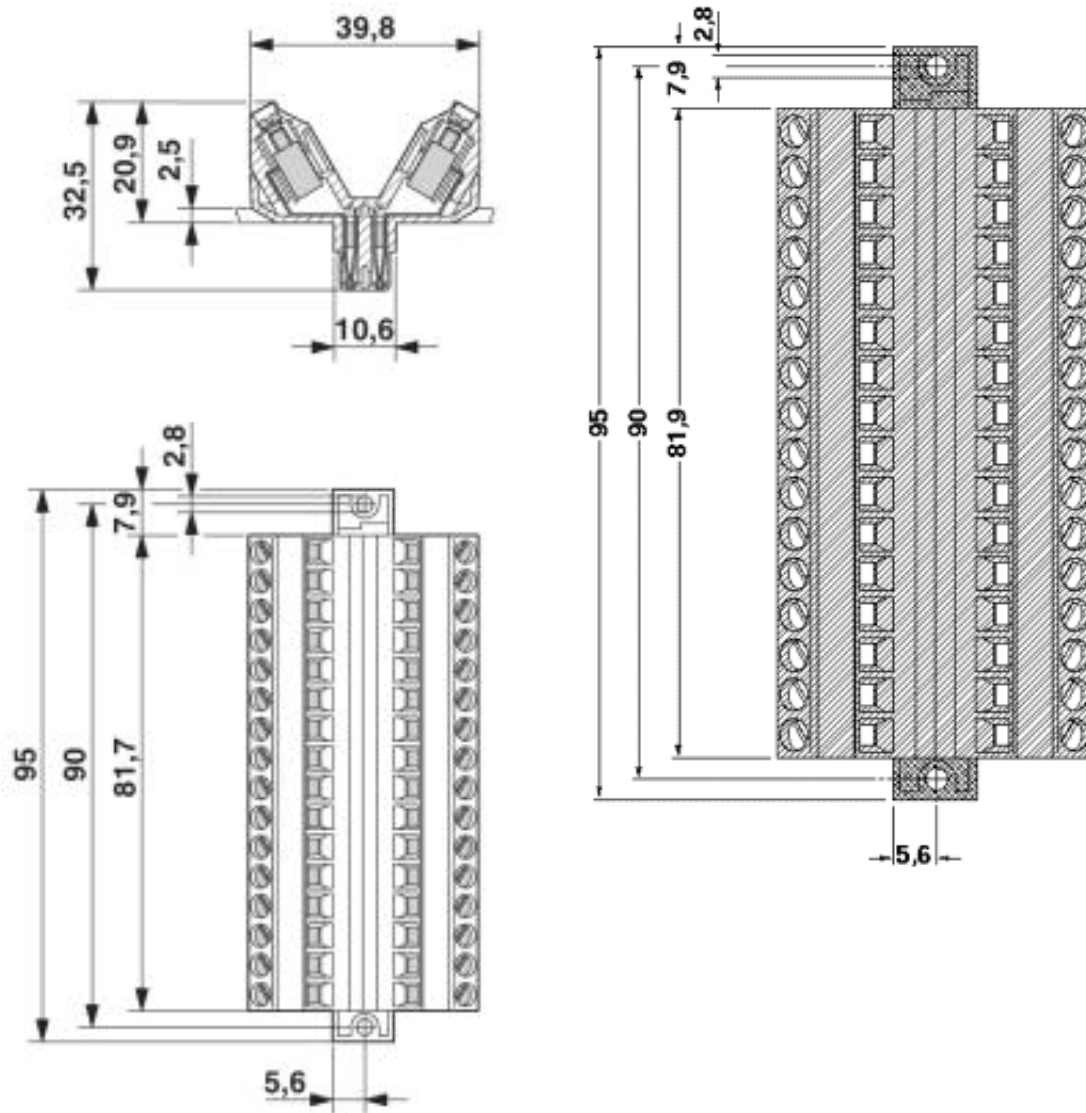

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact  
Technical modifications reserved;