

SKBI 31

Order No.: 2201519

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2201519>

Plug-in card block, Nominal current: 5 A, Nom. voltage: 250 V, Pitch: 5 mm, Number of positions: 31, Connection type: Screw connection, Color: green

Commercial data

EAN	4017918053260
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.1587 KG
Catalog page information	Page 520 (CC-2009)

Product notes

WEEE/RoHS-compliant since:
10/05/2005



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

Length	43 mm
Height	129 mm
Width	112 mm
Pitch	5 mm

Number of positions	31
Hole diameter	4.2 mm
Screw thread	M3
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm

Technical data

Connection in acc. with standard	EN-VDE
Nominal current I_N	5 A
Nominal voltage U_N	250 V
Stripping length	8 mm

Connection data


Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

Accessories


Item	Designation	Description
Assembly		
2261009	SF-SKBI 31/32	Snap foot, for horizontal or vertical mounting of the SKBI plug-in card blocks, on the NS 35/7.5 DIN rail
Plug/Adapter		
2204082	CS-SKBI	Keying pin, plastic, is subsequently inserted into a contact of the SKBI, color: Red
Tools		
1205053	SZS 0,6X3,5	Screwdriver, bladed, matches all screw terminal blocks up to 4.0 mm ² connection cross section, blade: 0.6 x 3.5 mm, without VDE approval

Drawings

Dimensioned drawing

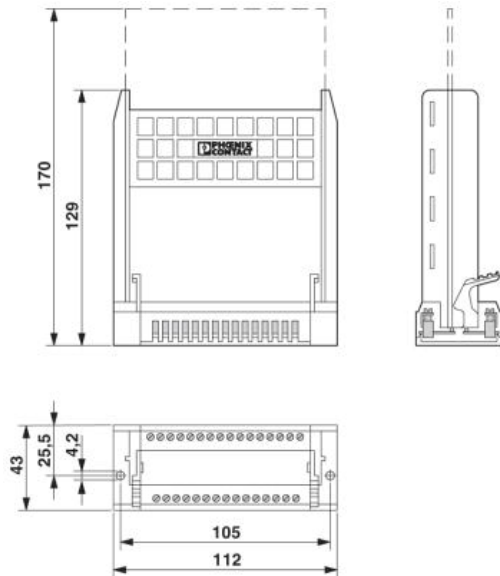

Schematic diagram

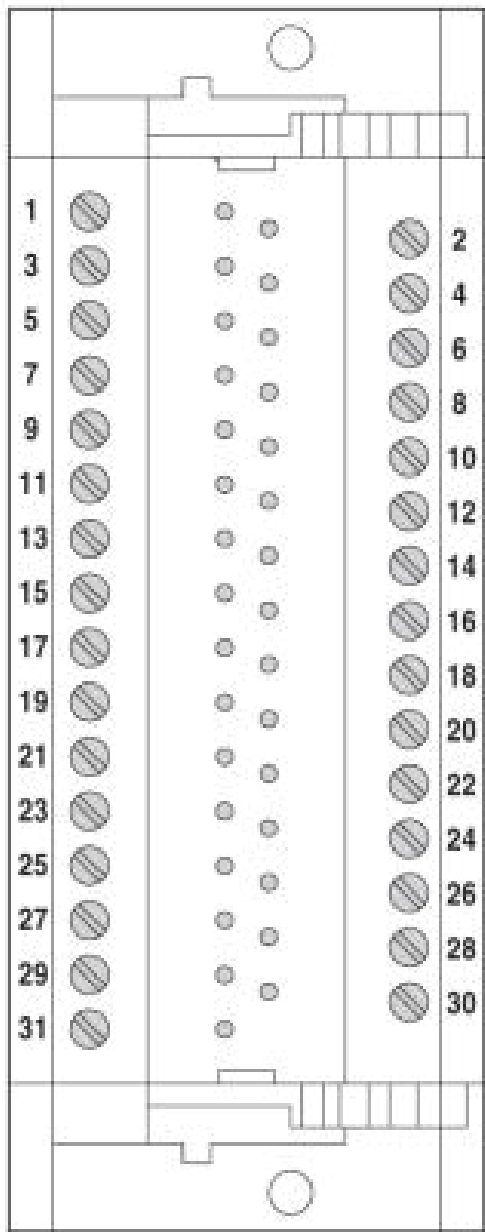

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;