

MSTBO 2,5/ 4-G1L THRR44 BK

Order No.: 2697194



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2697194>

Header, Nominal current: 16 A, Nom. voltage: 250 V, Pitch: 5 mm, Number of positions: 4, Color: black, Assembly: Taped SMD/THT/THR components

| Commercial data | |
|--------------------------|--------------------|
| EAN | 4046356040273 |
| Pack | 100 pcs. |
| Customs tariff | 85366990 |
| Weight/Piece | 0.00727 KG |
| Catalog page information | Page 244 (CC-2009) |

Product notes

WEEE/RoHS-compliant since:
01/01/2003




<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Accessories


| Item | Designation | Description |
|----------------|-------------|-------------|
| General | | |
| 2199618 | CR MSTBO-G1 | |

Drawings


Drilling diagram

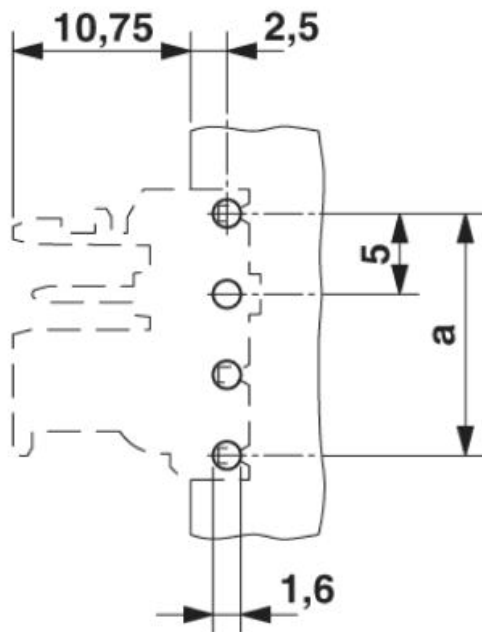


Diagram

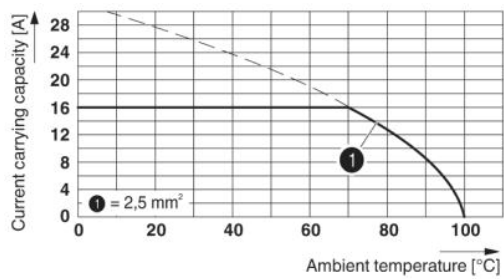

Dimensioned drawing

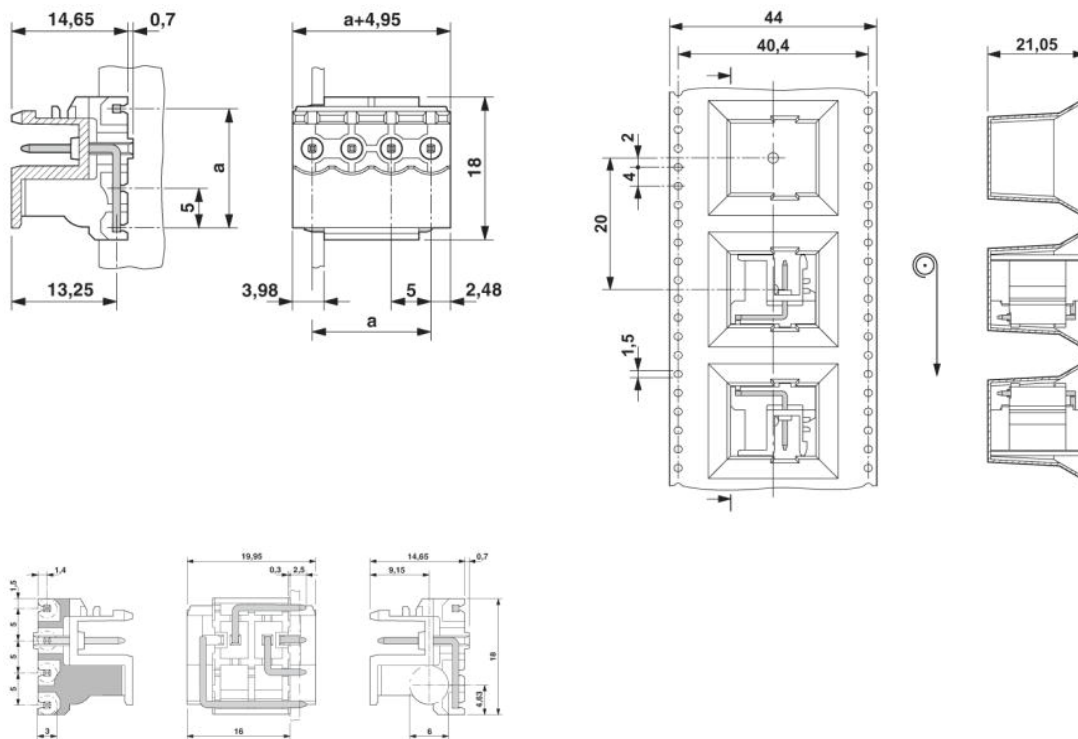

Schematic diagram

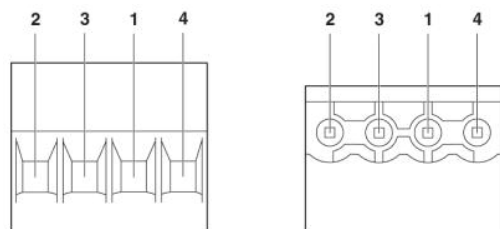

Pin assignment left

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;