


SK 3,8 REEL P6,2 WH CUS

Order No.: 0825126


The figure shows a version of the article

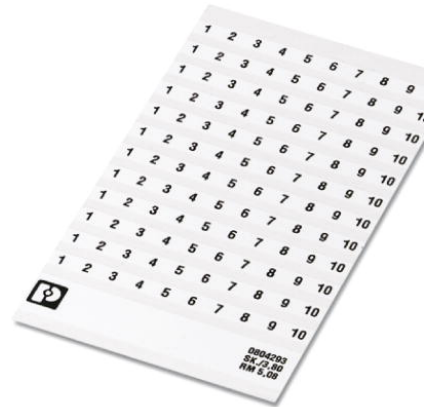

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=0825126>

Marker cards, can be ordered: By card, white, labeled according to customer specifications, Mounting type: Adhesive, for terminal block width: 6.2 mm, Lettering field: Continuous x 3.8 mm



Commercial data	
EAN	4  046356 355094
Note	Made-to-order
sales group	B109
Pack	1 Pcs.
Customs tariff	39191080
Gross weight in pieces	0.00105 KG
Net weight per piece	0.00093 KG
Catalog page information	Page 103 (C-5-2013)

Product notes

WEEE/RoHS-compliant since: 03/13/2008



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions	
Width (a)	3.8 mm
Ambient conditions	
Ambient temperature (operation)	-40 °C ... 150 °C
Ambient temperature (assembly)	> 15 °C
Recommended storage conditions	23 °C / 50% relative humidity. Storage in the original packaging is recommended prior to processing.

General

Note	Marking up to max. 25-pos.
Color	white
Components	free from silicone and halogen
Material	Polyester
Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
Number of marker strips	12
Adhesive	Acrylic
Printability	Thermal transfer
Device	5146477 THERMOMARK ROLL 5146231 THERMOMARK X1.2
Ink ribbon	5145384 THERMOMARK-RIBBON 110
Test for substances that would hinder coating with paint or varnish	VW PV 3.10.7:2005-02
Result	Test passed
Test specification weathering-resistance	Following ISO 4892-2:2013-03
Test duration	96 h
Wipe resistance test result	Test passed
Salt spray test specification	DIN EN 60068-2-11:2000-02
Test duration	96 h
Salt spray testing result	Test passed
Alternating condensation climate with SO2 test specification	DIN 50018:2013-05
Climate level	AHT 1.0 S
Cycles	2
Condensation test result	Test passed
Wipe resistance of test specification inscriptions	DIN EN 61010-1 (VDE 0411-1):2011-07
Result	Test passed
Foil strength	53 µm
Adhesive strength	20 µm
Marking mounting type	Adhesive

Certificates / Approvals


Certification

Certifications applied for:

Certification Ex:

Drawings

Schematic diagram

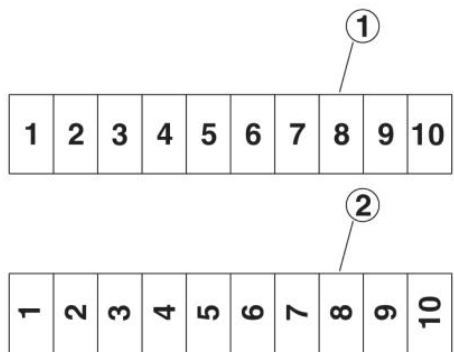

- ① Horizontal
- ② Vertical

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;