

SF-5EP1N8AF4DU

Order No.: 1605519

The figure shows the 8-pos. (4+3+PE) product version



<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1605519>

Coupler connector, straight, Screw locking, M23, Number of positions:
5+PE, Type of contact: Male connector, Crimp connection, shielded:
Yes, Cable diameter: 7.5 mm...14 mm

Commercial data

EAN	4 046356 253376
Note	Made-to-order
sales group	D300
Pack	20 Pcs.
Customs tariff	85366990
Gross weight in pieces	0.13736 KG
Net weight per piece	0.09219 KG

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General

Note	Order information Order crimp contacts 6 x Ø 2 mm separately
Type of locking	Screw locking
Coding	N
Contact connection method	Crimp connection
Type of contacts	Male connector

Number of positions	6
Contact diameter of power contacts	2 mm
Nominal current per power contact at 25°C	30 A
Contact diameter of signal contacts	2 mm
Nominal current per signal contact at 25°C	30 A
Conductor entry	7.5 mm ... 14 mm

Ambient conditions

Ambient temperature	-20 °C ... 125 °C
Degree of protection	IP67

Material

Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Insulator material	PA 66
Gasket and O-ring material	FPM

Specifications according to DIN EN 61984:2001

Installation height max.	3000 m
Nominal / operating voltage of power contacts	630 V
Rated surge voltage of power contacts	6 kV
Surge voltage category of power contacts	III
Pollution degree of power contacts	3
Nominal / operating voltage of signal contacts	630 V
Rated surge voltage of signal contacts	6 kV
Surge voltage category of signal contacts	III
Pollution degree of signal contacts	3

Certificates / Approvals

Certification


cULus Recognized

Certifications applied for:


Certification Ex:

Drawings


Diagram

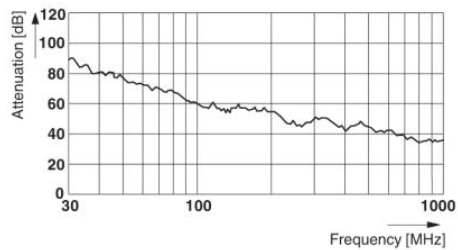

Dimensioned drawing

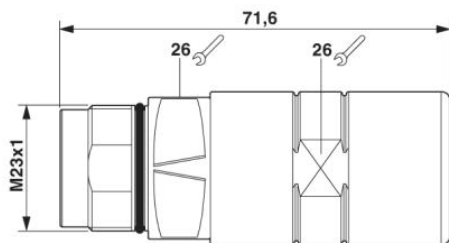

Schematic diagram

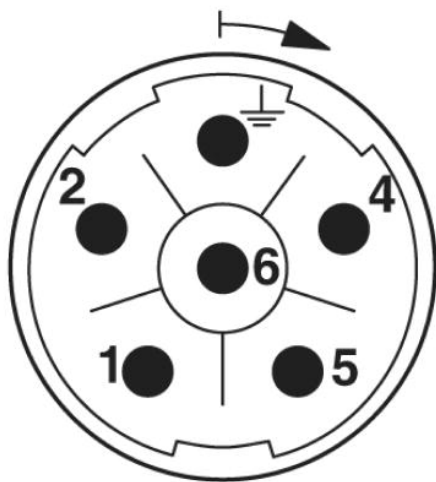

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;