

VS-25-SD

Order No.: 1652211

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1652211>

D-SUB protective cover, shell size 3, IP54 degree of protection, for panel mounting frame and sleeve housing VS-25-...

Commercial data

EAN	 4 017918 917142
sales group	D500
Pack	5 Pcs.
Customs tariff	85389099
Gross weight in pieces	0.00917 KG
Net weight per piece	0.00917 KG
Catalog page information	Page 219 (C-2-2013)

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Mechanical characteristics

Connection profile	25-pos. D-SUB
Locking type	Without
Insertion/withdrawal cycles	≥ 1000
Color	gray

Ambient conditions

Ambient temperature (operation)	-40 °C ... 80 °C
Degree of protection	IP54

Material data

Inflammability class according to UL 94	V0
---	----

Housing material	PA
Material	Plastic


Certificates / Approvals

Certification
Certifications applied for:
Certification Ex:

Drawings

Dimensioned drawing

Protective cover for D-SUB

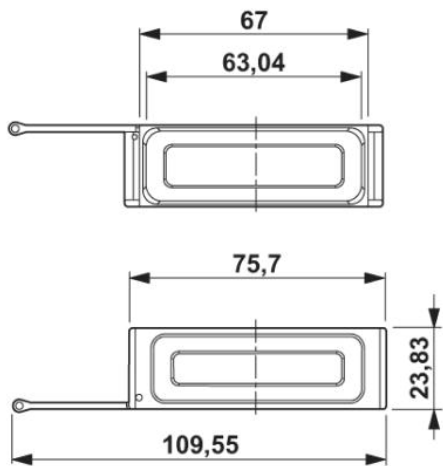

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2014 Phoenix Contact
Technical modifications reserved;